




TUKI 60S

1349-BB-907GGH-DD-I-K

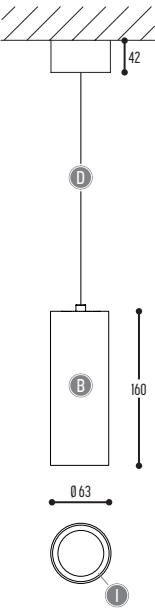

BB			EFF			GG		H		DD		I		K		
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		SUSP. CABLE		INSIDE COLOR		DRIVER		
02		Black	LED	907	>90 CRI • lx 895 Lm / 350 mA / 15 W	11	11°	2	2700 K	01	1,5 m	W		White	0	Incl./non dim
03		White				20	20°	3	3000 K	02	2,5 m	B		Black	4	Phase cut
						34	34°	4	4000 K			G		Gold		



TUKI 40
1340-BB-906GGH-I-K

Alu


1 LAMPS

0,3 kg

960°

IP40

NO UV/IR

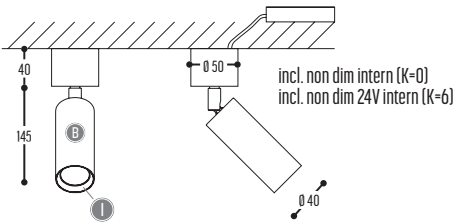

TUKI 40 BOX2
2091-BB-906GGH-I-K

Alu


1 LAMPS

0,3 kg

960°

IP40

NO UV/IR

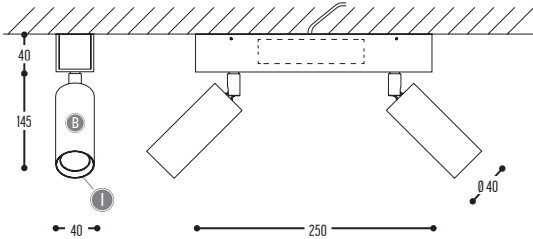

TUKI 40 BOX3
2092-BB-906GGH-I-K

Alu


1 LAMPS

0,3 kg

960°

IP40

NO UV/IR

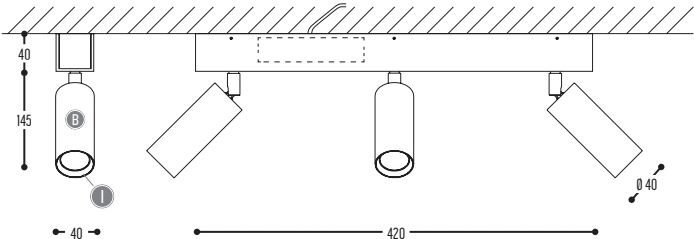

BB			EFF			GG		H		I		K	
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR		DRIVER	
02		Black	LED	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	22	22°	2	2700 K	W		0	incl./non dim
03		White				34	34°	3	3000 K	B		1	excl.
						54	54°	4	4000 K	G		2	Dim 1-10 V
												3	Dali
												4	Phase cut
												24V CONVERTER	
												6	incl./non dim
												8	Dali

TUKI 40 SET1/50

1353-BB-906GGH-I-K

Alu

1 LAMPS

10,3 kg

CE


230 V

365°

960°

IP40

NO UV/IR



TUKI 40 SET1/90

1343-BB-906GGH-I-K

Alu

1 LAMPS

10,3 kg

CE


230 V

365°

960°

IP40

NO UV/IR



TUKI 40 SET2

2081-BB-906GGH-I-K

Alu

1 LAMPS

10,3 kg

CE


230 V

365°

960°

IP40

NO UV/IR

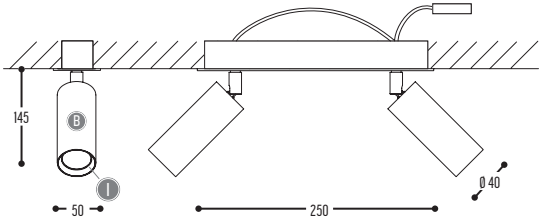

TUKI 40 SET3

2082-BB-906GGH-I-K

Alu

1 LAMPS

10,3 kg

CE


230 V

365°

960°

IP40

NO UV/IR

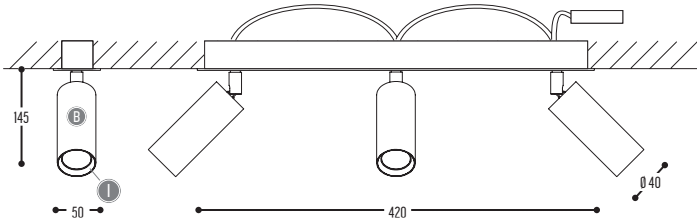

BB			EFF			GG		H		I			K						
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR			DRIVER extern						
02		Black	LED	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	22	22°	2	2700 K	W		White	0	incl./non dim					
03		White				34	34°	3	3000 K	B		Black	1	excl.					
						54	54°	4	4000 K	G		Gold	2	Dim 1-10 V					
																		3	Dali
																		4	Phase cut
																		24V CONVERTER extern	
																		6	incl./non dim
						8	Dali												



TUKI 60

1347-BB-907GGH-I-K

Alu

LAMPS

0,6 kg


CE

230 V

0,3 m

90°

IP20

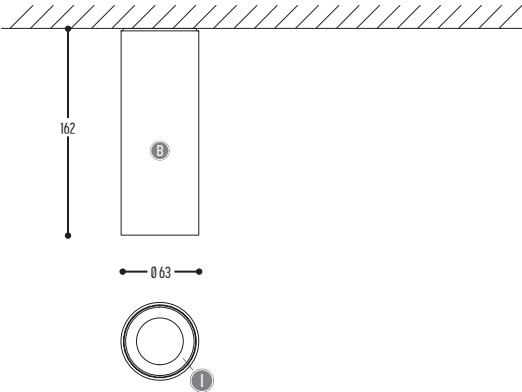

TUKI 60 MOVE

1345-BB-907GGH-I-K

Alu

LAMPS

0,4 kg

CE

230 V


0,3 m

90°

365°


80°

IP20

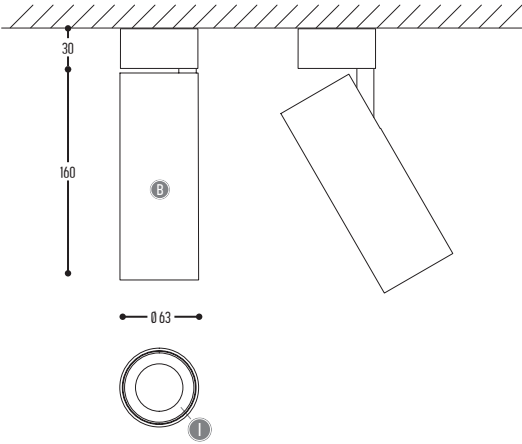

BB			EFF			GG		H		I		K		
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR		DRIVER		
02		Black	LED	907	>90 CRI • 1x 895 Lm / 350 mA / 15 W	11	11°	2	2700 K	W		White	0	incl./non dim
03		White				20	20°	3	3000 K	B		Black	4	Phase cut
						34	34°			G		Gold		

TUKI WALL



2020-BB-90600H-K

Alu

2 LAMPS

10,8 kg

CE

230 V

0,3 m

960°

IP20

BB			EFF			H		K	
COLORS			CRI • LUMENOUTPUT			COLOR TEMP.		DRIVER	
02		Black	LED	906	>90 CRI • 2x600 Lm / 350 mA / 6,4 W	2	2700 K	0	incl./non dim
03		White				3	3000 K	1	excl.
112		Gold point				4	4000 K	2	Dim 1-10 V (extern)
								3	Dali (extern)
							4	Phase-cut (extern)	



TUKI 40 TRACK

1341-BB-906GGH-I-0

Alu

LAMPS

10,4 kg

CE

230 V


0,3m

80°

365°

960°

IP20

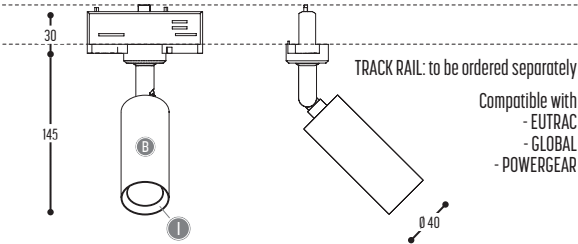

TUKI 40 IN-TRACK

1352-BB-906GGH-I-0

Alu

LAMPS

10,4 kg

CE

230 V


0,3m

80°

365°

960°

IP20

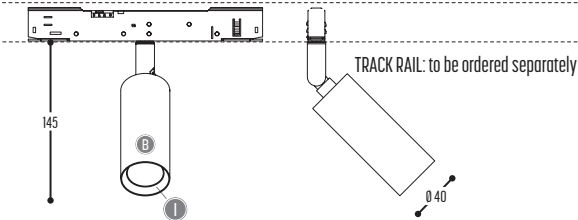

BB			EFF			GG		H		I			K	
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR			DRIVER	
02		Black	LED	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	22	22°	2	2700 K	W		White	0	incl./non dim
03		White				34	34°	3	3000 K	B		Black		
						54	54°	4	4000 K	G		Gold		

TUKI 40 TRACK MAGNETIC

1355-BB-906GGH-I-K

Alu

1 LAMPS

0,4 kg

CE

230 V


0,3 m

80°

365°

960°

IP20

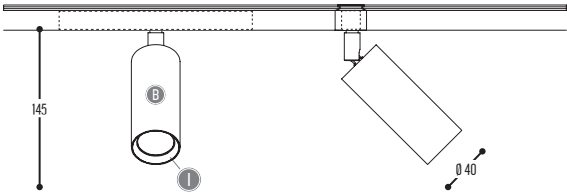

TRACK RAIL: to be ordered separately
Compatible with
STUCCHI standard low voltage track

TUKI 40 TRACK LOW VOLTAGE

1354-BB-906GGH-I-6

Alu

1 LAMPS

0,4 kg

CE

230 V


0,3 m

80°

365°

960°


IP20

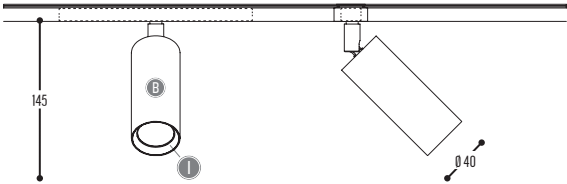


TRACK RAIL: to be ordered separately
compatible with
EUTRAC low voltage led-trac

BB			EFF			GG		H		I			K	
COLORS			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR			24V CONVERTER	
02		Black	LED	906	>90 CRI • 600 Lm / 350 mA / 6,4 W	22	22°	2	2700 K	W		White	6	incl./non dim
03		White				34	34°	3	3000 K	B		Black	7	Dim. 1-10V
						54	54°	4	4000 K	G		Gold	8	Dali

TUKI 60 TRACK

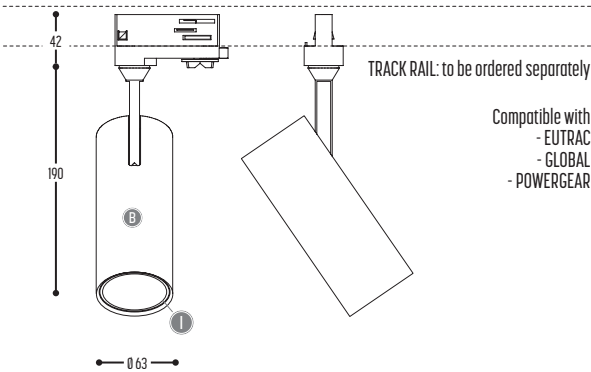

1346-BB-065-I
1346-BB-907GGH-I-K



BB			CCC						I					
COLORS			TYPE						INSIDE COLOR					
02		Black	 230 V	065	GU10		QPAR51 (MAX 50 W)	W		White				
03		White						B		Black				
								G		Gold				
			EFF			GG		H	I		K			
			CRI • LUMENOUTPUT			REFLECTOR		COLOR TEMP.		INSIDE COLOR		DRIVER		
			LED	907	>90 CRI • 895 Lm / 350 mA / 15 W	11	11°	2	2700 K	W		White	0	incl./non dim
						20	20°	3	3000 K	B		Black	4	Phase cut
						34	34°			G		Gold		

TUKI 75 TRACK



1350-BB-916GGH-I-4
1350-BB-EFFGGH-I-0

Alu

1 LAMPS

10,0 lm

CE

230 V


0,3 m

960°

365°

80°

IP20

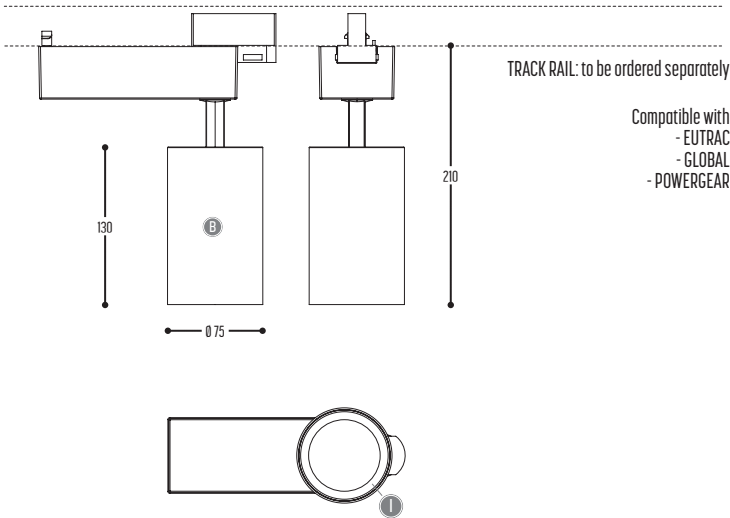

BB			EFF				GG		H		I			K	
COLORS			CRI • LUMENOUTPUT				REFLECTOR		COLOR TEMP.		INSIDE COLOR			DRIVER	
02		Black	LED	916	>90 CRI • 1600 Lm / 350 mA / 18 W		24	24°	2	2700 K	B		Black	0	incl./non dim
03		White		921	>90 CRI • 2100 Lm / 500 mA / 20 W		34	34°	3	3000 K	G		Gold	4	Phase cut
				928	>90 CRI • 2850 Lm / 700 mA / 28 W		40	40°							
				935	>90 CRI • 3500 Lm / 900 mA / 36 W										