


TUKI 60

design dark studio for dark

1/4

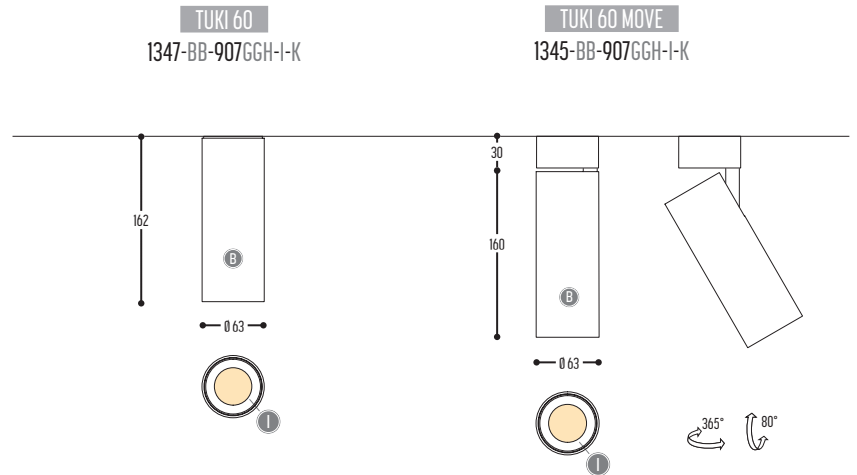


BB	COLORS	02	Black
		03	White
EFF	CRI • LUMENOUTPUT	907	>90 CRI • 895 Lm / 350 mA / 15 W
GG	REFLECTOR	11	11°
		20	20°
		34	34°
H	COLOR TEMP.	2	2700K
		3	3000K
I	INSIDE COLOR	W	White
		B	Black
		G	Gold
K	DRIVER	0	Non dimmable (intern)
		4	Phase cut (intern)




DARK®

© DARK 2021 - Dark has the right to change any technical data, dimensions, colors and characteristics without prior notice. All rights reserved. Please check always the latest technical data sheets on www.dark.be. Any reproduction of the Dark products is strictly forbidden and can seriously damage your health and endanger your bank account.

DARK at night nv
 Vliegplein 43
 9991 Maldegem – Belgium
 +32 50 71 81 40
info@dark.be
www.dark.be

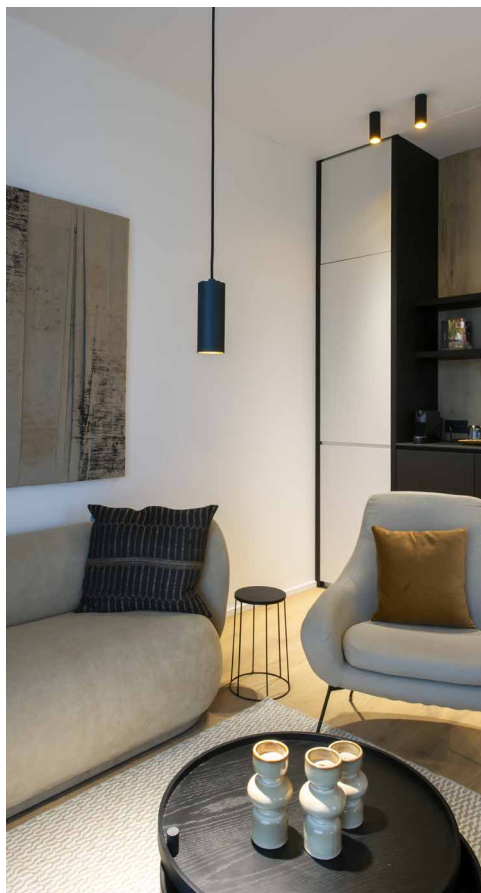

TUKI 60S
1349-BB-907GGH-DD-I-K

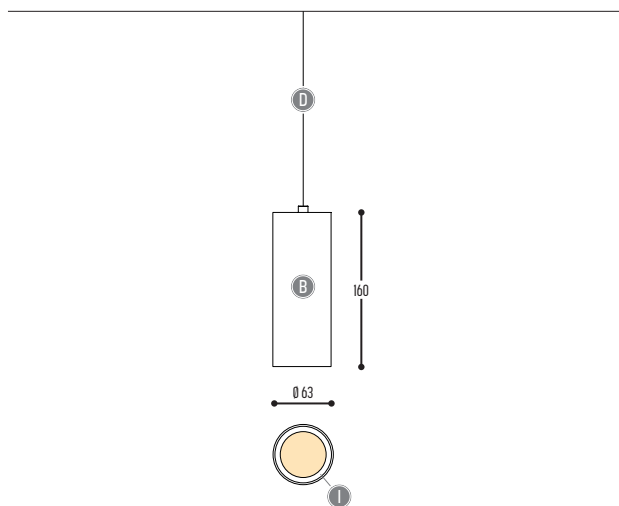


BB	COLORS	02	Black
		03	White
EFF	CRI • LUMENOUTPUT	907	>90 CRI • 895 Lm / 350 mA / 15 W
GG	REFLECTOR	11	11°
		20	20°
		34	34°
H	COLOR TEMP.	2	2700K
		3	3000K
		4	4000K
DD	SUSP. CABLE	01	1,5 m
		02	2,5 m
I	INSIDE COLOR	W	White
		B	Black
		G	Gold
K	DRIVER	0	Non dimmable (intern)
		4	Phase cut (intern)






TUKI 60 WALL
2020-BB-90600H-K

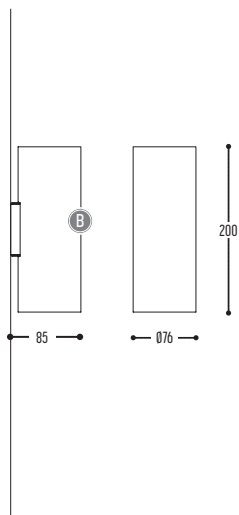


BB(B)	COLORS	02	Black
		03	White
		112	Gold Finish
		RAL color on request	
EFF	CRI • LUMENOUTPUT	906	>90 CRI • 2X 600 Lm / 350 mA / 6,4 W
GG	REFLECTOR	00	N.A.
		2	2700K
		3	3000K
H	COLOR TEMP.	3	3000K
		4	4000K
K	DRIVER	1	No driver
		0	Non dimmable (intern)
		2	Dimmable 1-10 V (extern)
		3	Dali (extern)
		4	Phase cut (intern)


Alu        

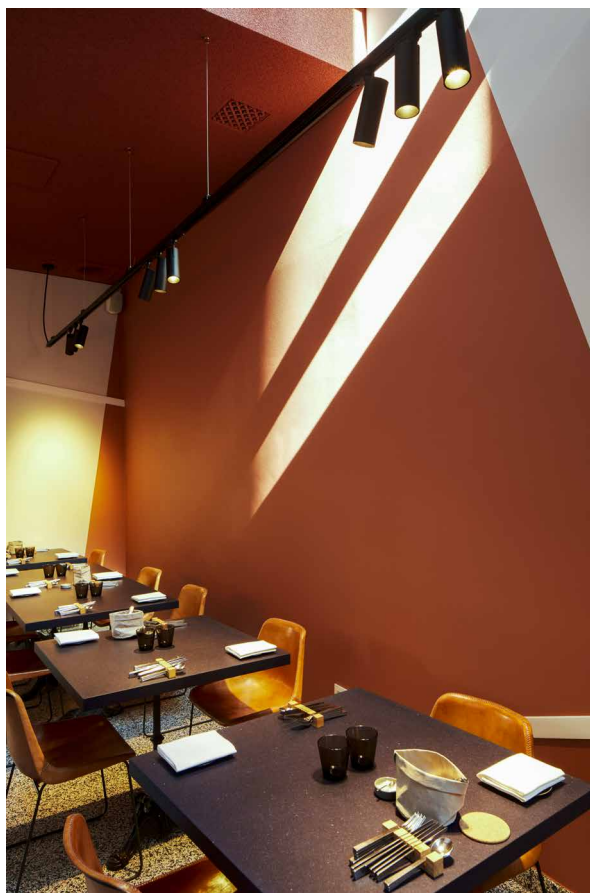

TUKI 60 TRACK
1346-BB-907GGH-I-K

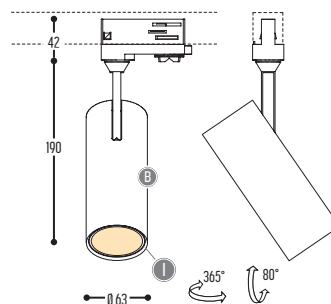

TRACK RAIL: to be ordered separately
Compatible with EUTRAC, GLOBAL & POWERGEAR

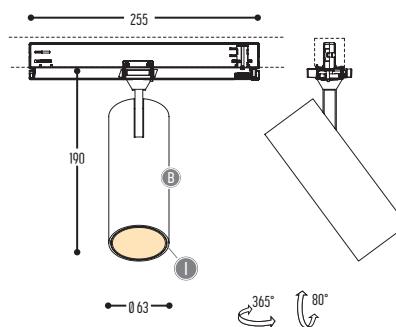

DALI - version

TRACK RAIL: to be ordered separately
Compatible with GLOBAL & POWERGEAR

BB(B)	COLORS	02	Black
		03	White
EFF	CRI • LUMENOUTPUT	907	>90 CRI • 895 Lm / 350 mA / 15 W
GG	REFLECTOR	11	11°
		20	20°
		34	34°
H	COLOR TEMP.	2	2700K
		3	3000K
I	INSIDE COLOR	W	White
		B	Black
		G	Gold
K	DRIVER	0	Non dimmable (intern)
		3	Dali (intern)
		4	Phase cut (intern)

