


# TUKI 60


design dark studio



The Jane Tab - Photo Piet Albert Goethals

TUKI 60

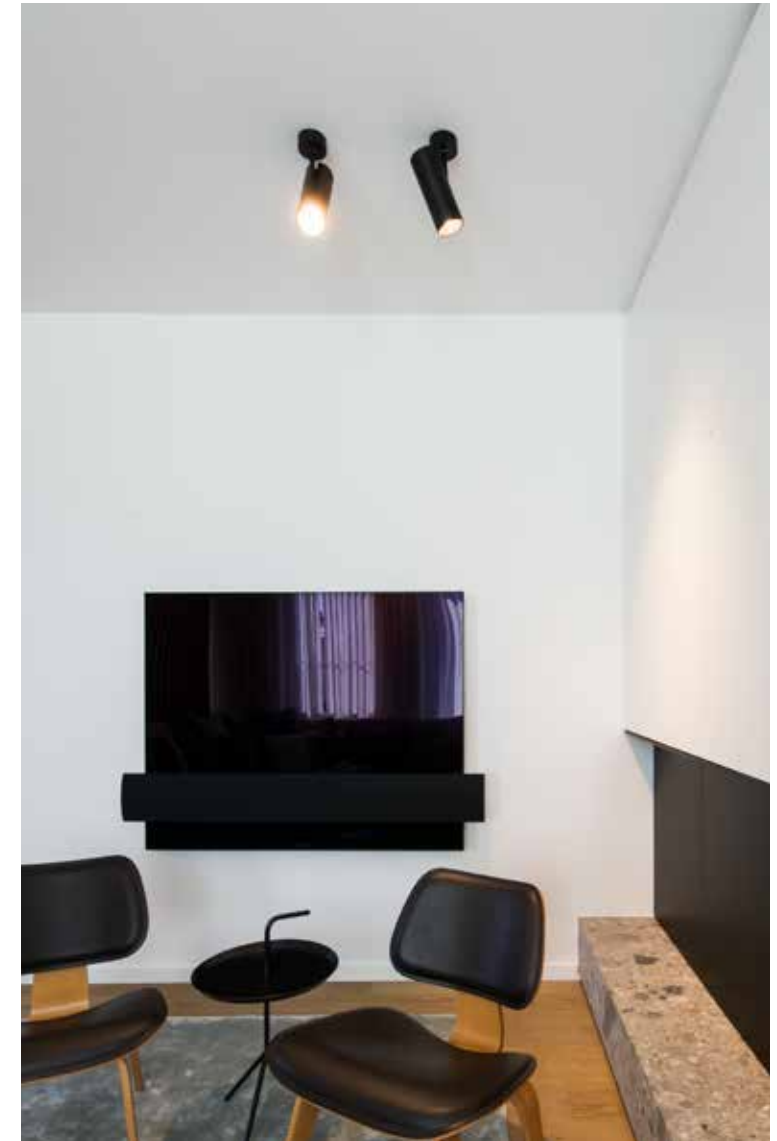

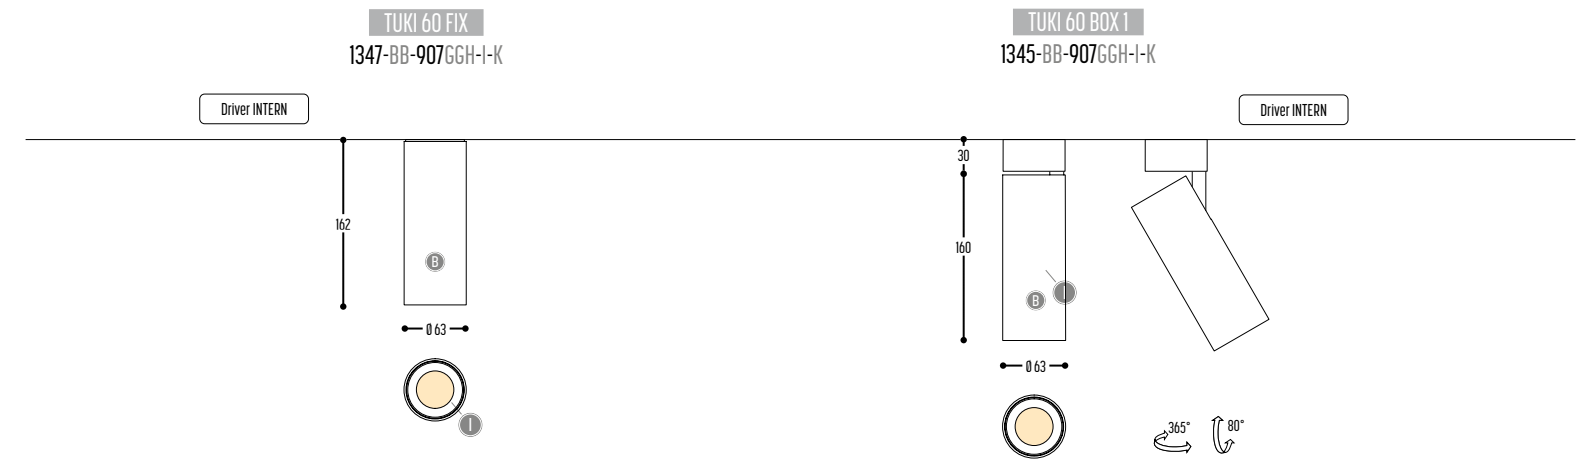

BB	COLORS	02	Black
		03	White
EFF	CRI • LUMENOUTPUT	907	>90 CRI • 895 Lm / 350 mA / 12 W
		GG	REFLECTOR
GG	REFLECTOR	11	11°
		20	20°
		34	34°
H	COLOR TEMP.	2	2700K
		3	3000K
		4	4000K
		I	INSIDE COLOR
B	Black		
G	Gold		
K	DRIVER	0	Non dimmable (intern)
		3	Dali (extern)
		4	Phase cut (intern)

ACCESSORIES p. xx

	HONEYCOMB	172-9005-438099	Black
		172-9003-438099	White
		172-0112-438099	Gold






TUKI 60

**TUKI 60S**  
1349-BB-907GGH-DD-I-K


Driver INTERN

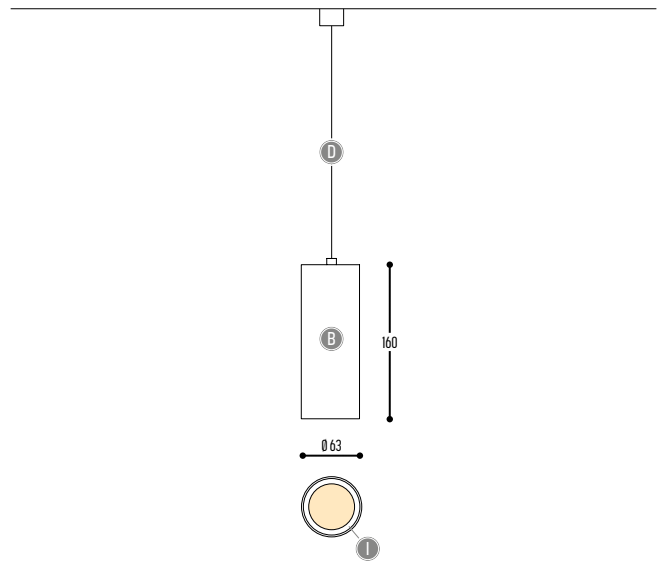

BB	COLORS	02	Black
		03	White
EFF	CRI • LUMENOUTPUT	907	>90 CRI • 895 Lm / 350 mA / 12 W
GG	REFLECTOR	11	11°
		20	20°
		34	34°
H	COLOR TEMP.	2	2700K
		3	3000K
		4	4000K
DD	SUSP. CABLE	01	1,5 m
		02	2,5 m
I	INSIDE COLOR	W	White
		B	Black
		G	Gold
K	DRIVER	0	Non dimmable (intern)
		3	Dali (extern)
		4	Phase cut (intern)



**TUKI 60 WALL**  
2020-BB-90600H-K



BB(B)	COLORS	02	Black
		03	White
		112	Gold
			RAL color on request
EFF	CRI • LUMENOUTPUT	906	>90 CRI • 2X 600 Lm / 350 mA / 6,4 W
GG	REFLECTOR	00	N.A.
		2	2700K
		4	4000K
H	COLOR TEMP.	3	3000K
		4	4000K
K	DRIVER	1	No driver
		0	Non dimmable (intern)
		3	Dali (extern)
		4	Phase cut (intern)



ACCESSORIES p. xx


	HONEYCOMB	172-9005-438099	Black
		172-9003-438099	White
		172-0112-438099	Gold








**TUKI 60 TRACK**  
1346-BB-EFFGGH-I-K

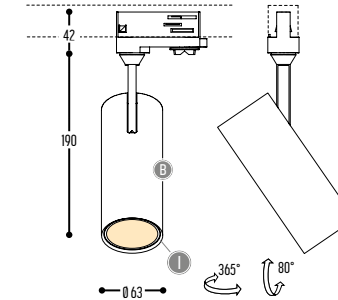

TRACK RAIL: to be ordered separately  
Compatible with EUTRAC, GLOBAL & POWERGEAR

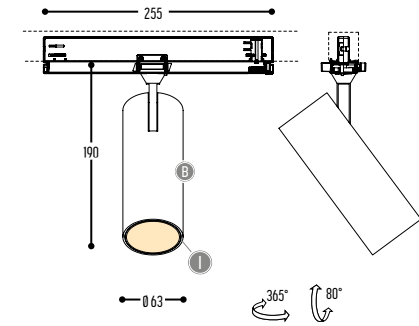

**DALI - version**

TRACK RAIL: to be ordered separately  
Compatible with GLOBAL & POWERGEAR

ACCESSORIES p. xx

	HONEYCOMB	172-9005-438099		Black
		172-9003-438099		White
		172-0112-438099		Gold

BB(B)	COLORS	02		Black
		03		White
EFF	CRI • LUMENOUTPUT	907	>90 CRI • 1360 Lm / 350 mA / 12 W	
		918	>90 CRI • 1800 Lm / 500 mA / 20 W	
		930	>90 CRI • 3000 Lm / 700 mA / 30 W	
GG	REFLECTOR	11	11°	
		20	20°	
		34	34°	
H	COLOR TEMP.	2	2700K	
		3	3000K	
I	INSIDE COLOR	W		White
		B		Black
		G		Gold
K	DRIVER	0	Non dimmable (intern)	
		3	Dali (intern)	
		4	Phase cut (intern)	

