

MR BEAM

design detail concept




reddot design award
winner 2017





MR.BEAM 1


1600 mm 2301-BBB-1H-DD-II(I)-[J]-LL-K

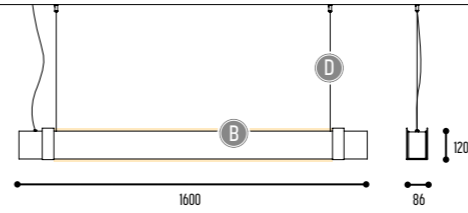









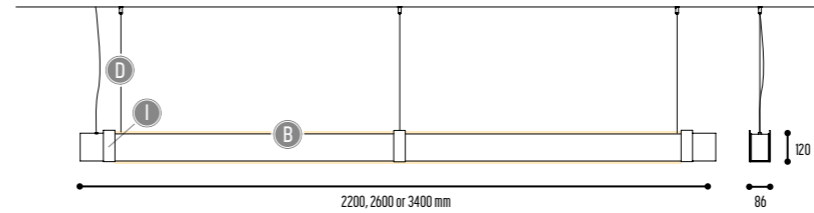

2200 mm 2306-BBB-1H-DD-II(I)-[J]-LL-K


2600 mm 2304-BBB-1H-DD-II(I)-[J]-LL-K

3400 mm 2307-BBB-1H-DD-II(I)-[J]-LL-K




| | | | | |
|-----------------|--------------|-----|---|--------------------------|
| BBB | MATERIAL | 117 |  | Oak stained black |
| | | 118 |  | Oak natural |
| | | 131 |  | Oak stained white |
| F | LED | 1 | length 1600 mm | >90 CRI • 2920 Lm / 24 W |
| | | | length 2200 mm | >90 CRI • 5886 Lm / 36 W |
| | | | length 2600 mm | >90 CRI • 7194 Lm / 44 W |
| | | | length 3400 mm | >90 CRI • 9810 Lm / 60 W |
| H | COLOR TEMP. | 2 | 2700K | |
| | | 3 | 3000K | |
| DD | SUSP. CABLE. | 01 | 1,5 m | |
| | | 02 | 2,5 m | |
| II(I) | COLORS | 02 |  | Black |
| | | 03 |  | White |
| | | 110 |  | Brass |
| | | 150 |  | Bronze Light |
| | | 151 |  | Bronze Dark |
| [J] optional | UPLIGHT | 1 | 9,6 W / m | |
| LL | SUSP. KIT | 02 |  | Black |
| | | 03 |  | White |
| K | DRIVER | 0 | Non dimmable (intern) | |
| | | 3 | Dali (intern) | |
| | | 4 | Phase cut (intern) | |



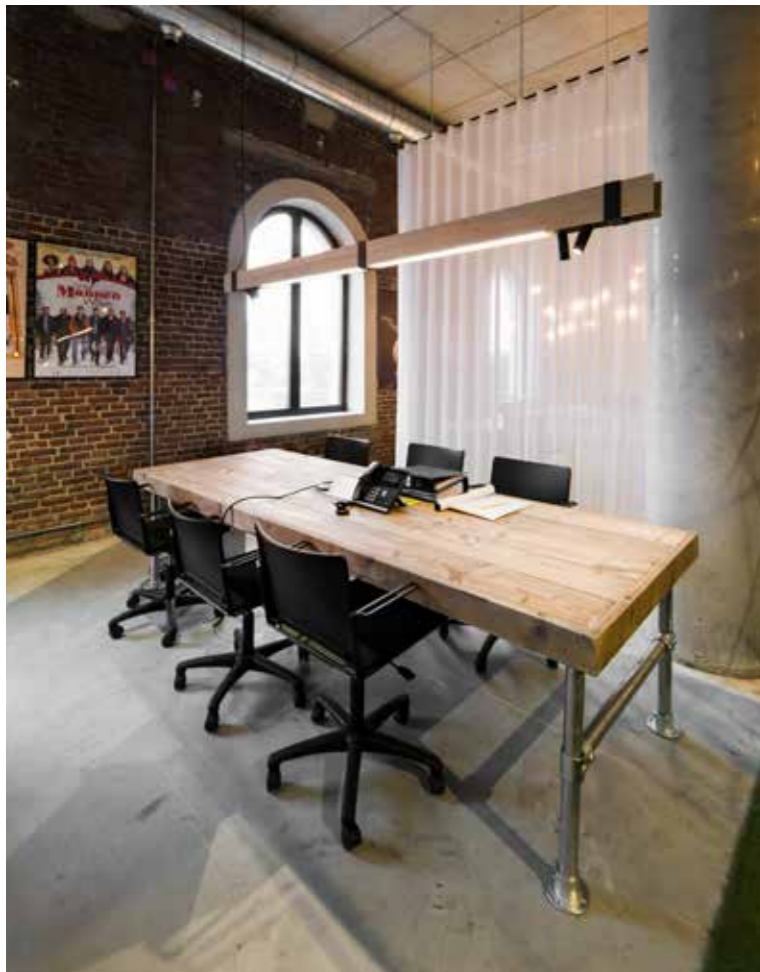


MR.BEAM 2

1600 mm 2302-BBB-1H-DD-II(I)-(J)-LL-K-T

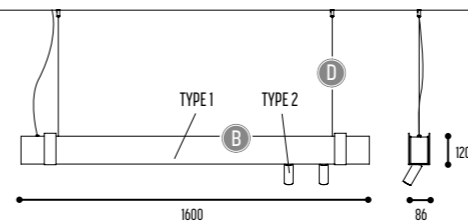

2200 mm 2308-BBB-1H-DD-II(I)-(J)-LL-K-T
 2600 mm 2305-BBB-1H-DD-II(I)-(J)-LL-K-T
 3400 mm 2309-BBB-1H-DD-II(I)-(J)-LL-K-T

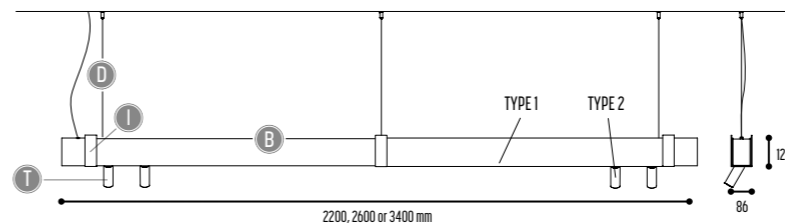

| | | | | |
|-----------------|--------------|----------------------|-----------------------|--|
| BBB | MATERIAL | 117 | Black | Oak stained black |
| | | 118 | White | Oak natural |
| | | 131 | Yellow | Oak stained white |
| | | RAL color on request | | |
| F | LED | 1 | length 1600 mm | >90 CRI • 2943 Lm / 18 W |
| | | | length 2200 mm | >90 CRI • 3920 Lm / 24 W |
| | | | length 2600 mm | >90 CRI • 5232 Lm / 32 W |
| | | | length 3400 mm | >90 CRI • 7848 Lm / 48 W |
| H | COLOR TEMP. | 2 | 2700K | |
| | | 3 | 3000K | |
| DD | SUSP. CABLE. | 01 | 1,5 m | |
| | | 02 | 2,5 m | |
| II(I) | COLORS | 02 | Black | |
| | | 03 | White | |
| | | 110 | Yellow | Brass |
| | | 150 | Light Grey | Bronze Light |
| | | 151 | Dark Grey | Bronze Dark |
| [J] optional | UPLIGHT | 1 | 9,6 W / m | |
| LL | SUSP. KIT | 02 | Black | |
| | | 03 | White | |
| K | DRIVER | 0 | Non dimmable (intern) | |
| | | 3 | Dali (intern) | |
| | | 4 | Phase cut (intern) | |
| | | | | |
| TYPE 2 | T | SPOTS | 1 | >90 CRI • 600 Lm / 350 mA / 6,4 W Reflector 54° - Incl driver - non dim |

