


SPACE WALKER

design pieterjan



reddot design award
best of the best 2009

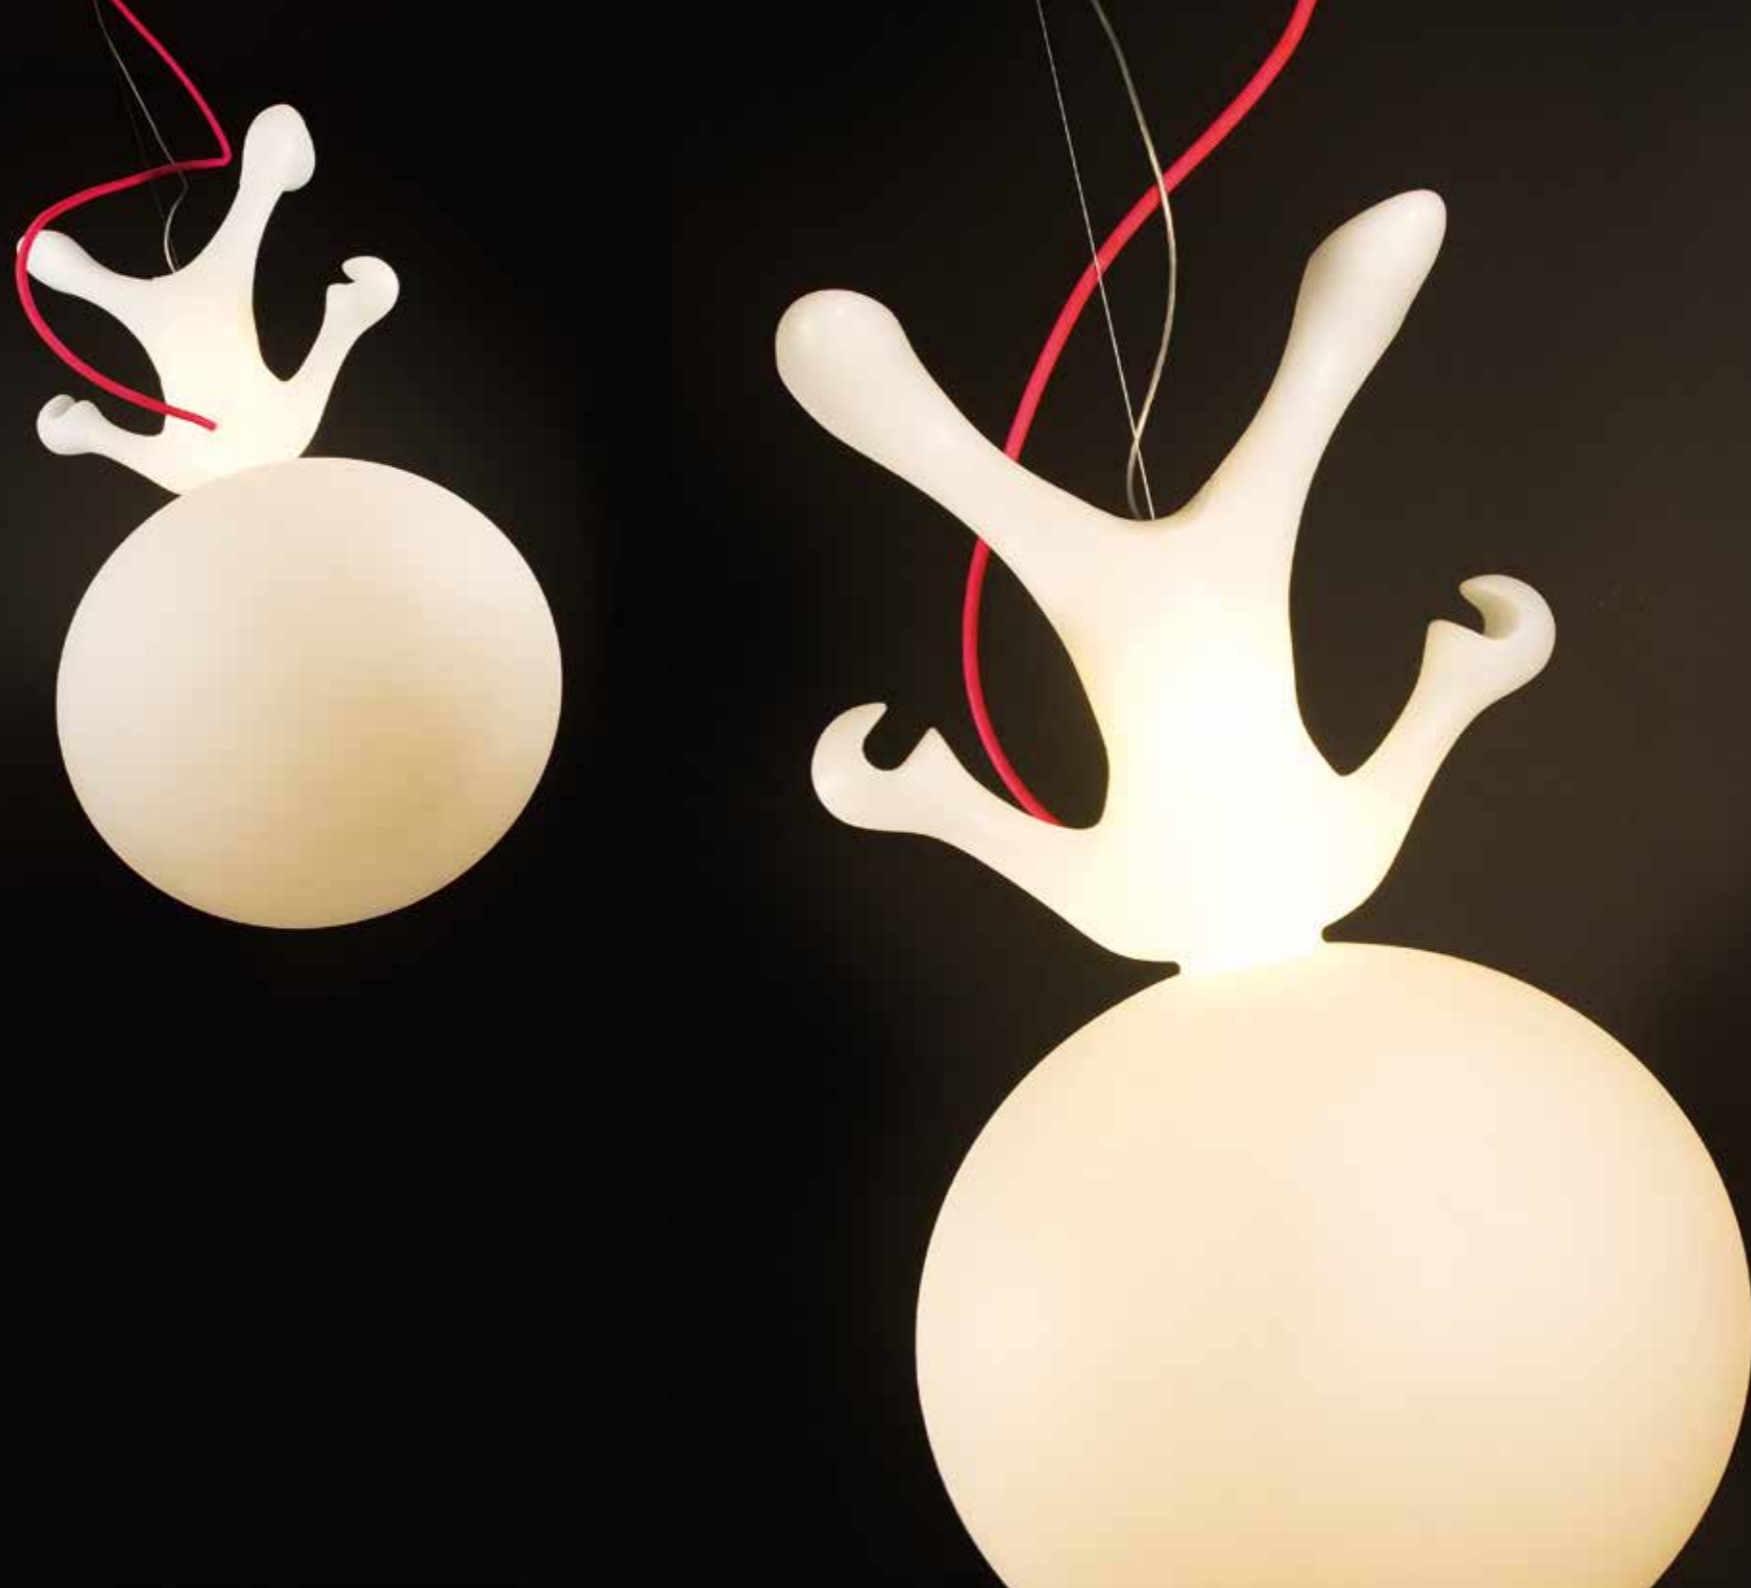

LEUCHTE DES
JAHRES 2010
3. PLATZ



Designpreis
Deutschland
2010

NOMINEE




GOOD
DESIGN




SPACEWALKER

580-03-CCC-DD
580-03-5103-DD-K
580-03-EFF-DD-K

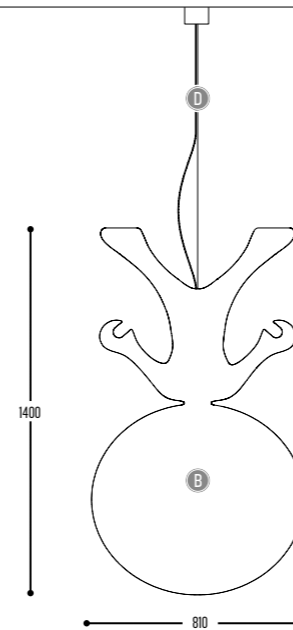

SPACEWALKER FLOOR

581-03-5103-00-K
581-03-EFF-00-K

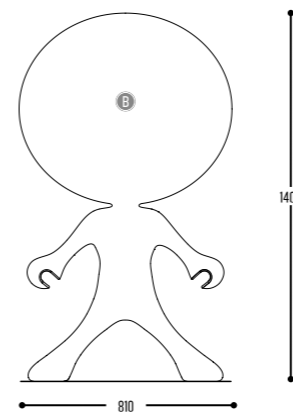

IP65 LED version
available on request

BB	MATERIAL	03	White (translucent)
CCC	TYPE G5	339	T16 (39 W) Non Dim
		340	T16 (39 W) Dim 1-10 V
		341	T16 (39 W) ONE 4 ALL
EFF H	CRI • LUMENOUTPUT	510	>90 CRI • 8000 Lm / 480 mA / 75 W
	COLOR TEMP.	3	3000K
DD	SUSP. CABLE	00	N.A.
		02	2,5 m
		03	5 m
K	DRIVER	0	Non dimmable (intern)
		2	Dimmable 1-10 V (intern)
		3	Dali (intern)

BB	MATERIAL	03	White (translucent)
EFF	CRI • LUMENOUTPUT	500	RGB
		505	RGBW
DD	SUSP. CABLE	00	N.A.
		02	2,5 m
		03	5 m
K	DRIVER	0	Standalone • remote control (intern)
		3	Dali (intern)
		9	DMX (intern)

