




**HIHOPE**  
design dark studio






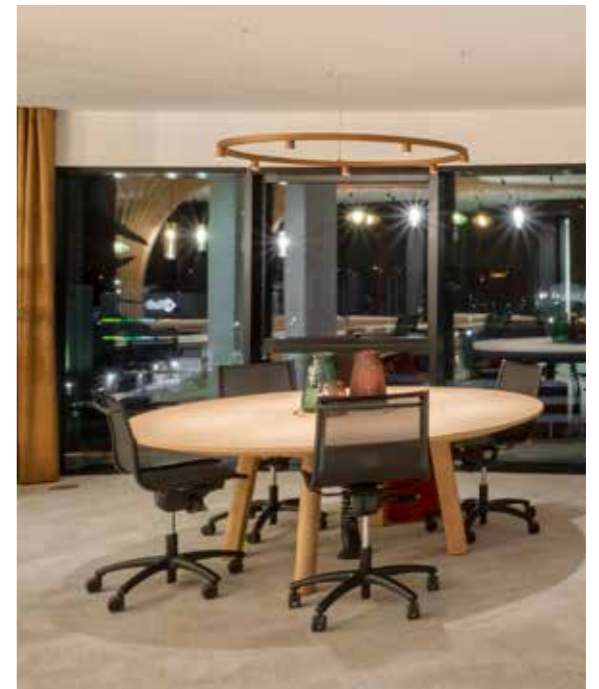


HIHOPE TIKI 950  
1941-BB-90600H-DD-II(I)-K





950

HIHOPE TIKI 1200  
1942-BB-90600H-DD-II(I)-K





1200

HIHOPE TIKI 1500  
1943-BB-90600H-DD-II(I)-K





1500

HIHOPE TIKI 1800  
1944-BB-90600H-DD-II(I)-K



1800


HIHOPE TIKI ORGANIC 1  
1955-BB-90600H-DD-II(I)-K



1193

729



HIHOPE TIKI ORGANIC 2  
1956-BB-90600H-DD-II(I)-K

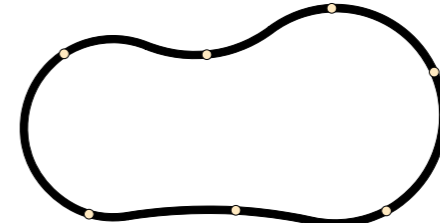

1725

924


HIHOPE TIKI ORGANIC 3  
1957-BB-90600H-DD-II(I)-K

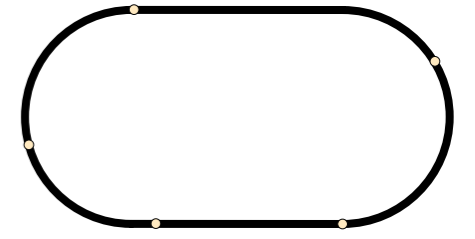

1850




950

BB	COLOR RING	02	Black
		03	White
		RAL color on request	
EFF	CRI • LUMENOUTPUT	906	>90 CRI • 600 Lm / 350 mA / 6,4 W (per spot)
GG	REFLECTOR	00	N.A.
		2	2700K
H	COLOR TEMP.	3	3000K
		RAL color on request	
DD	SUSP. CABLE	01	1,5 m
		02	2,5 m
		03	5 m
II(I)	COLOR TIKI	02	Black
		03	White
		111	Brass Finish
		150	Bronze Light
		151	Bronze Dark
RAL color on request			
K	DRIVER	0	Non dimmable (extern)
		3	Dali (extern)

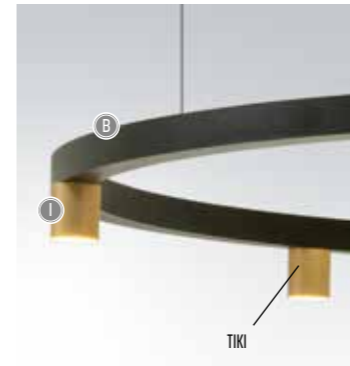



HIHOPE MOVE  
AAAA-BB(B)-DD-M-II-H-(J)-K

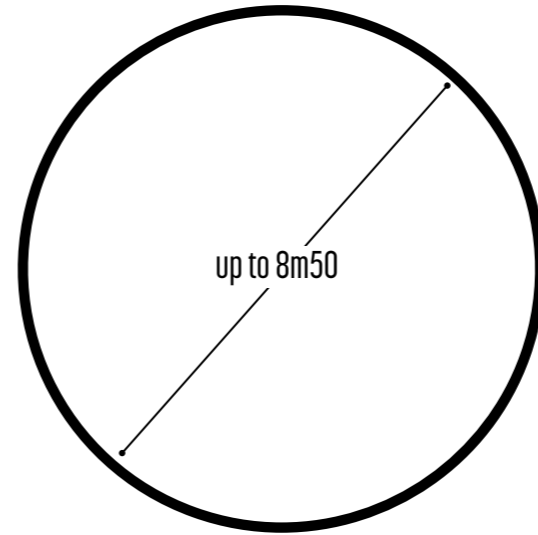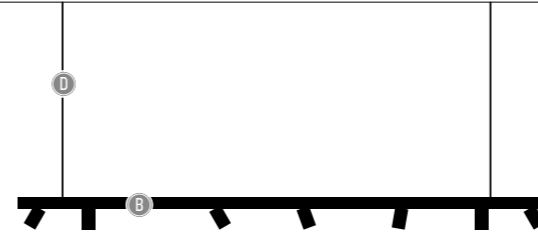

AAAA	MODEL DIAMETER	1931	Ø 8500 mm - 20 spots	
		1932	Ø 6000 mm - 15 spots	
		1933	Ø 4500 mm - 12 spots	
		1934	Ø 3000 mm - 10 spots	
BB(B)	COLOR RING	02	Black	
		03	White	
		111	Brass Finish	
		RAL color on request		
DD	SUSP. CABLE	01	1,5 m	
		02	2,5 m	
		03	5 m	
M	SPOT	TUKI 60	2	>90CRI • 895 Lm / 350mA / 15W / 34° (per spot)
II	COLOR SPOT	02	Black	
		03	White	
H	COLOR TEMP.	2	2700K	
		3	3000K	
		4	4000K	
(J)	INLIGHT (optional)	1	Ledline 14 W / m	
K	DRIVER	0	Non dimmable (extern)	
		3	Dali (extern)	

