



EMANUELLE

design gregoire maisondieu



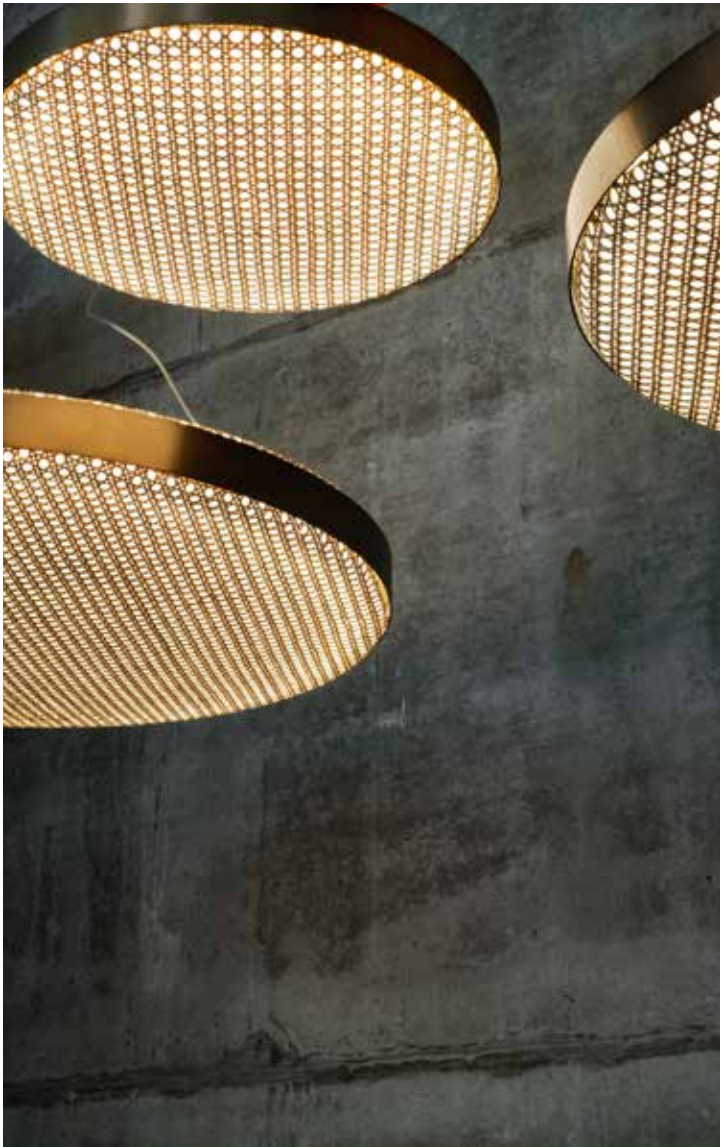

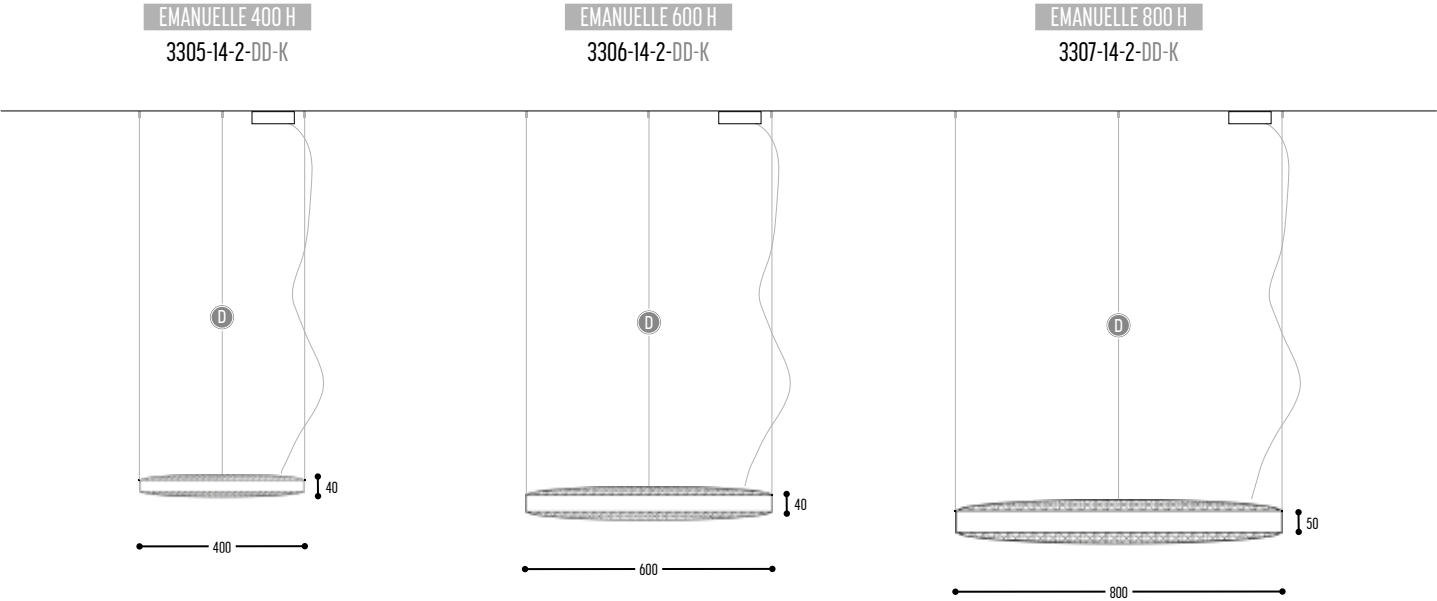

FF	LED	14	>90 CRI • 800 Lm / 14 W/m
			>90 CRI • 1200 Lm / 14 W/m
			>90 CRI • 1500 Lm / 14 W/m
H	COLOR TEMP.	2	2700K
DD	SUSP. CABLE.	01	1,5 m
		02	2,5 m
K	DRIVER	0	Non dimmable (intern)
		3	Dali (extern)
		4	Phase cut (intern)

Alu-PC

CE

CV

230 V


960°

IP20







EMANUELLE 400 V
3300-14-2-DD-K

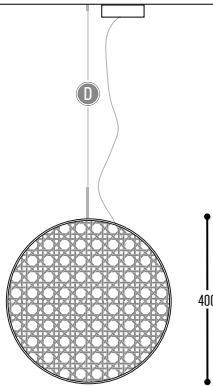

EMANUELLE 600 V
3301-14-2-DD-K

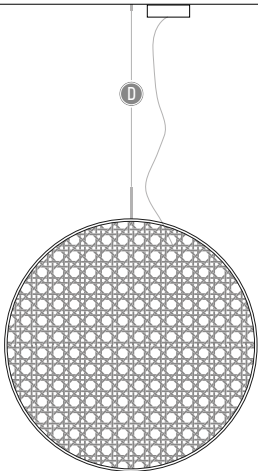


EMANUELLE 800 V
3302-14-2-DD-K

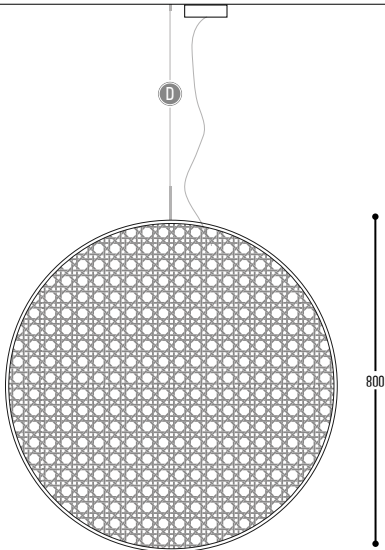


FF	LED	14	>90 CRI • 800 Lm / 14 W/m
			>90 CRI • 1200 Lm / 14 W/m
			>90 CRI • 1500 Lm / 14 W/m
H	COLOR TEMP.	2	2700K
DD	SUSP. CABLE.	01	1,5 m
		02	2,5 m
K	DRIVER	0	Non dimmable (intern)
		3	Dali (extern)
		4	Phase cut (intern)



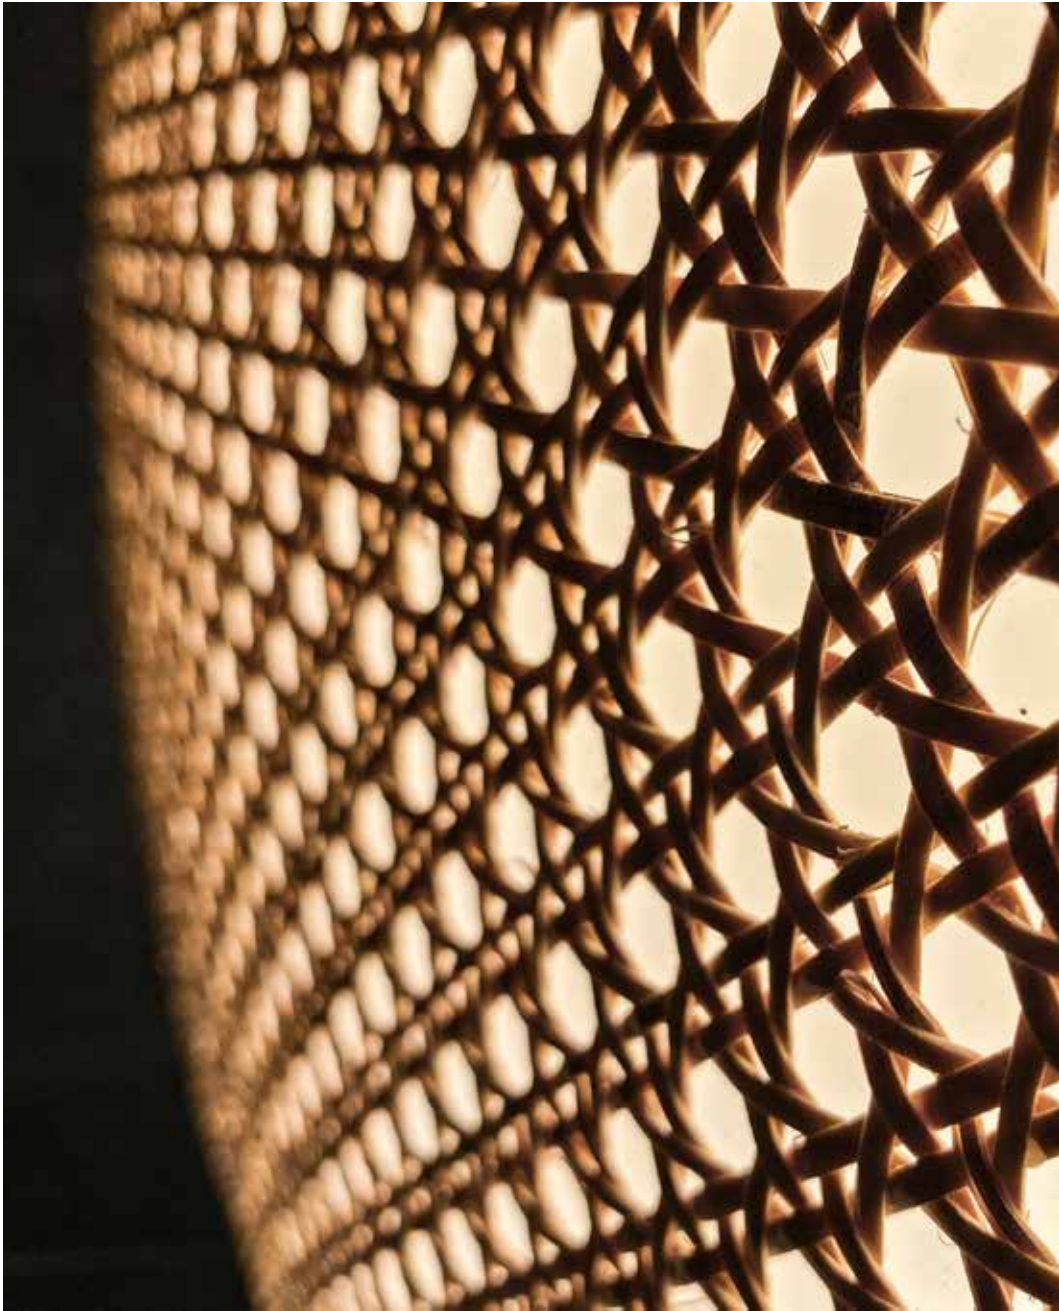

EMANUELLE 400 W
3310-14-2-K



FF	LED	14	>90 CRI • 800 Lm / 14 W/m
H	COLOR TEMP.	2	2700K
K	DRIVER	0	Non dimmable (intern)
		3	Dali (extern)
		4	Phase cut (intern)

Alu-PC

CE

960°

IP20

