


EQUALIZER

design lbrand





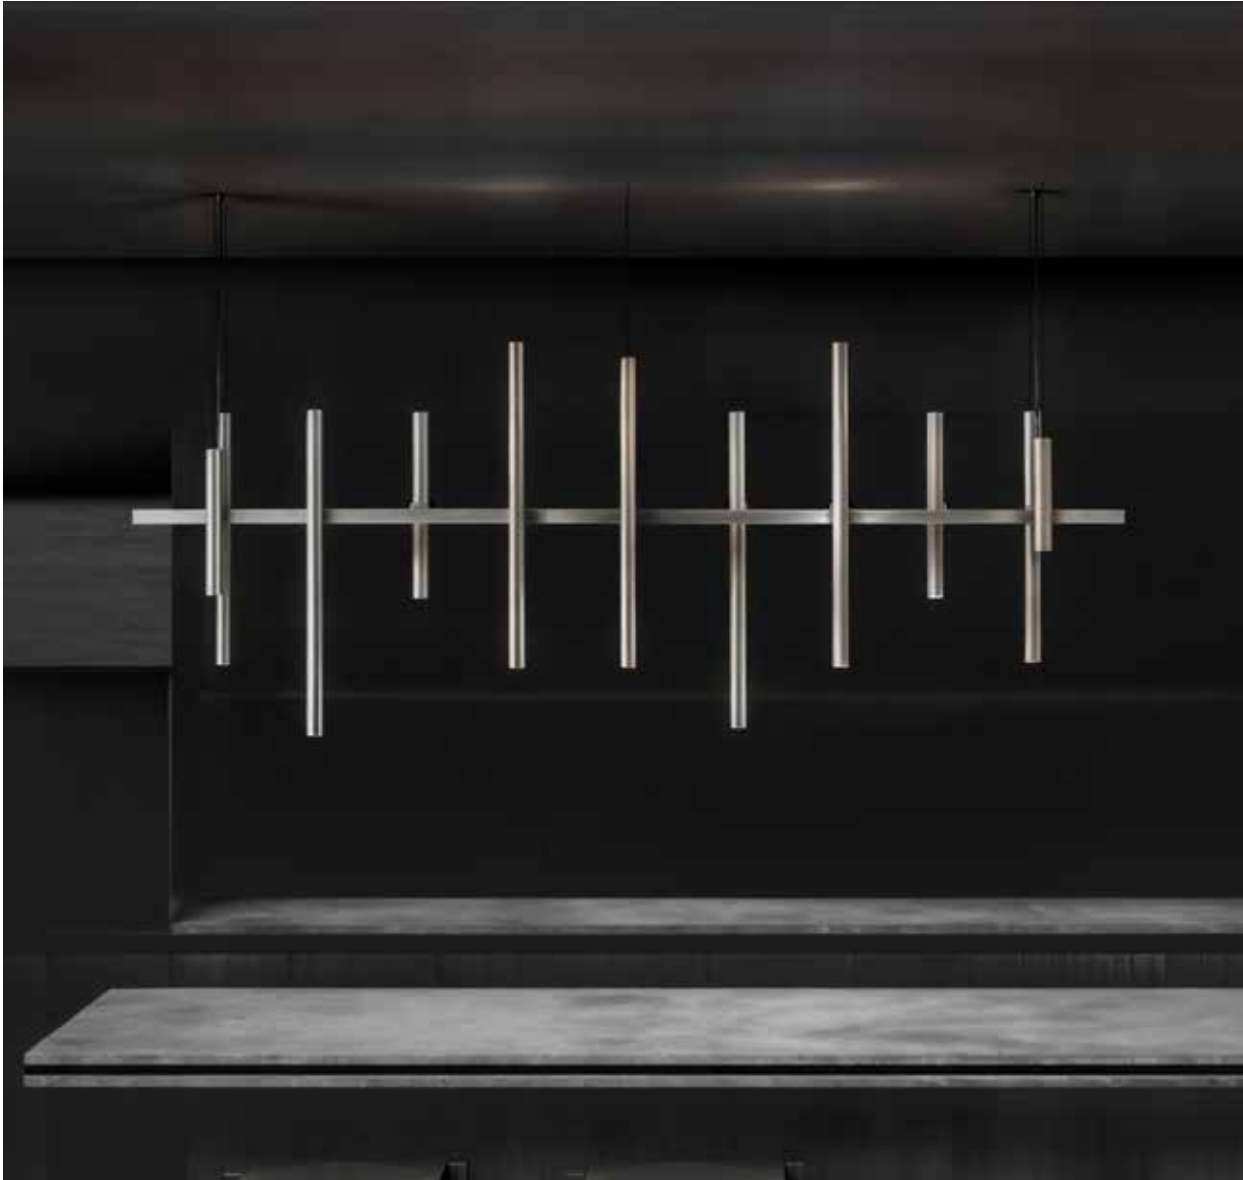

Chalet Vanipoul - Skialux



EQUALIZER 1600

3501-BB(B)-903H-DD-K-L-MM

BB(B)	COLORS	02		Black
		03		White
		10		Alu
		150		Bronze Light
		151		Bronze Dark
EFF	CRI • LUMENOUTPUT	903	>90 CRI • 350 mA / 3,5 W	
H	COLOR TEMP.	2	2700K	
		3	3000K	
DD	SUSP. CABLE	01	1,5 m	
		02	2,5 m	
K	DRIVER	0	Non dimmable (extern)	
		3	Dali / Push Dim (extern)	
L	LIGHTING	1	down (1 driver extern) 9x 280 Lm	
		2	up/down (2 drivers extern) 18x 280 Lm	
MM	TYPE	01	1600 Concrete ceiling - driver remote - down	
		02	1600 Concrete ceiling - driver remote - up/down	
		03	1600 Concrete ceiling - driver in ceiling base - down	
		04	1600 Concrete ceiling - driver in ceiling base - up/down	
		05	1600 Plaster board - driver recessed in base - down	
		06	1600 Plaster board - driver recessed in base - up/down	
		07	1600 Plaster board - driver remote - down	
		08	1600 Plaster board - driver remote - up/ down	

Metal-Alu



EQUALIZER 2500

3500-BB(B)-903H-DD-K-L-MM



BB(B)	COLORS	02		Black
		03		White
		10		Alu
		150		Bronze Light
		151		Bronze Dark
EFF	CRI • LUMENOUTPUT	903	>90 CRI • 350 mA / 6,4 W	
H	COLOR TEMP.	2	2700K	
		3	3000K	
DD	SUSP. CABLE	01	1,5 m	
		02	2,5 m	
K	DRIVER	0	Non dimmable (extern)	
		3	Dali / Push Dim (extern)	
L	LIGHTING	1	down (1 driver extern) 10x 420 Lm	
		2	up/down (2 drivers extern) 20x 420 Lm	
MM	TYPE	01	2500 Concrete ceiling - driver remote - down	
		02	2500 Concrete ceiling - driver remote - up/down	
		03	2500 Concrete ceiling - driver in ceiling base - down	
		04	2500 Concrete ceiling - driver in ceiling base - up/down	
		05	2500 Plaster board - driver recessed in base - down	
		06	2500 Plaster board - driver recessed in base - up/down	
		07	2500 Plaster board - driver remote - down	
		08	2500 Plaster board - driver remote - up/ down	

Metal-Alu




CONCRETE CEILING
DRIVER REMOTE

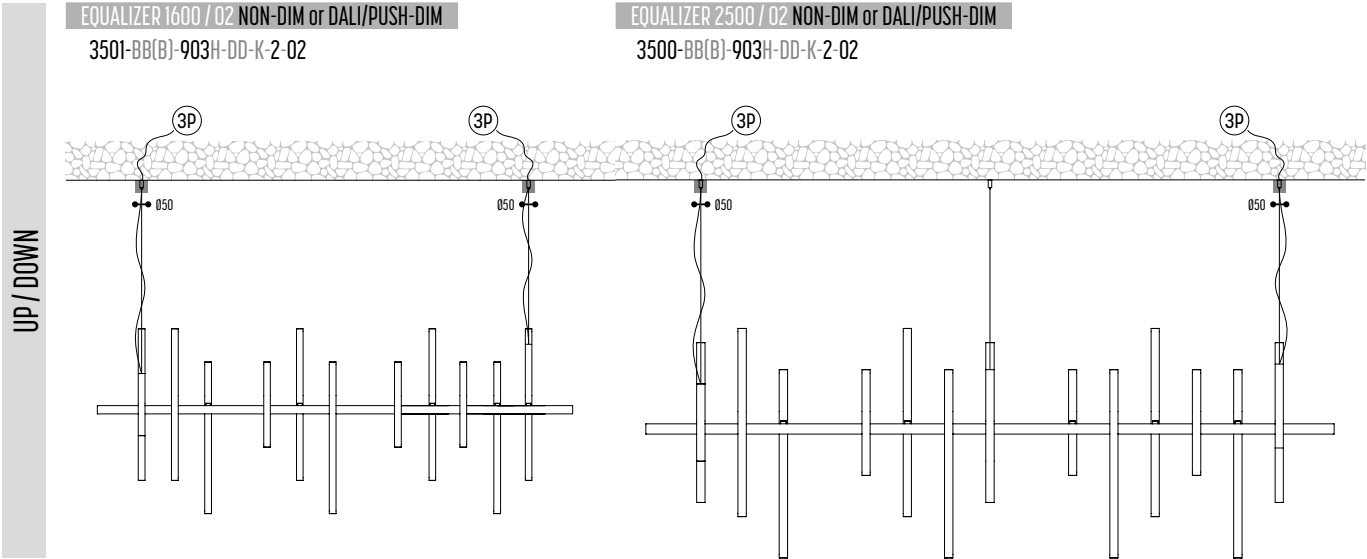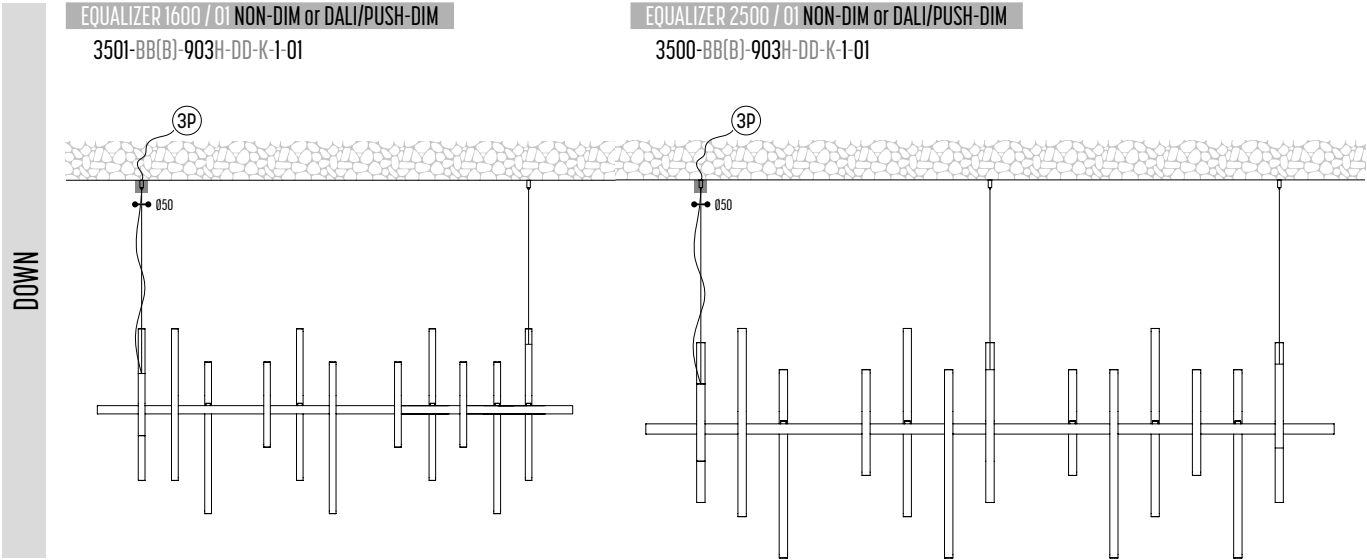



CONCRETE CEILING
DRIVER IN CEILING BASE

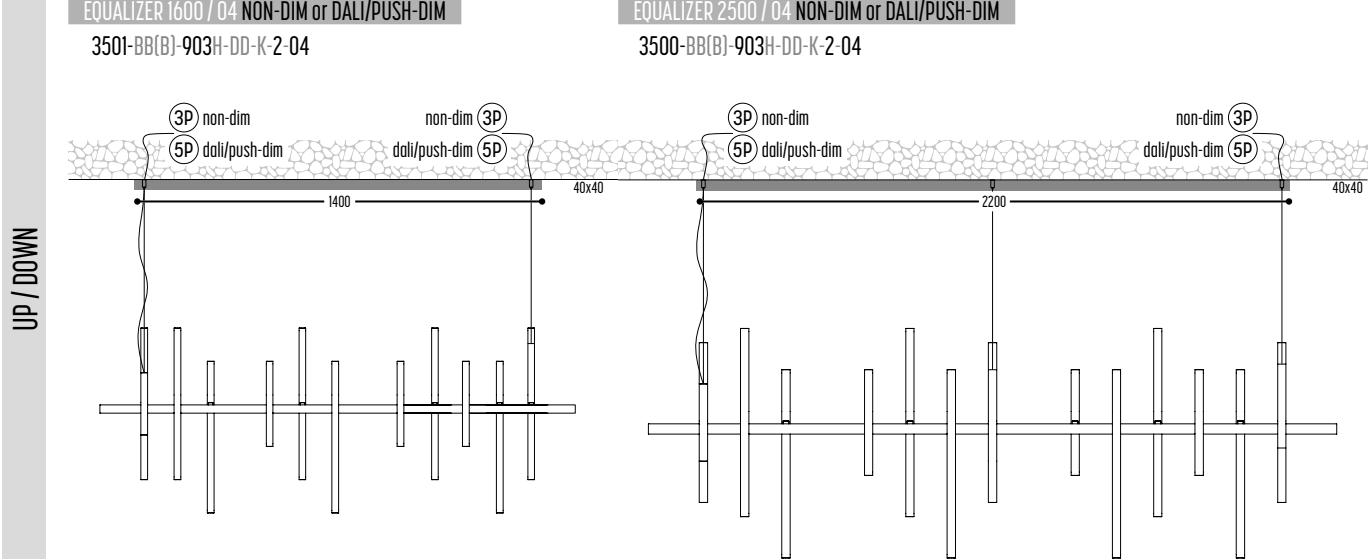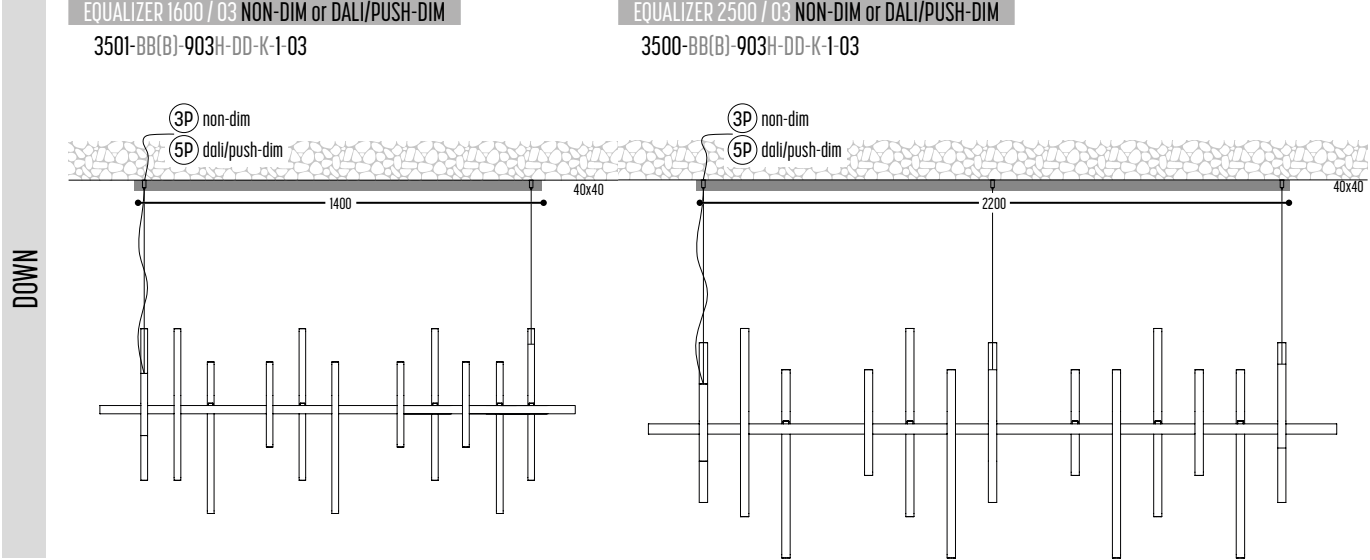

PLASTERBOARD – BA13
DRIVER RECESSED IN BASE

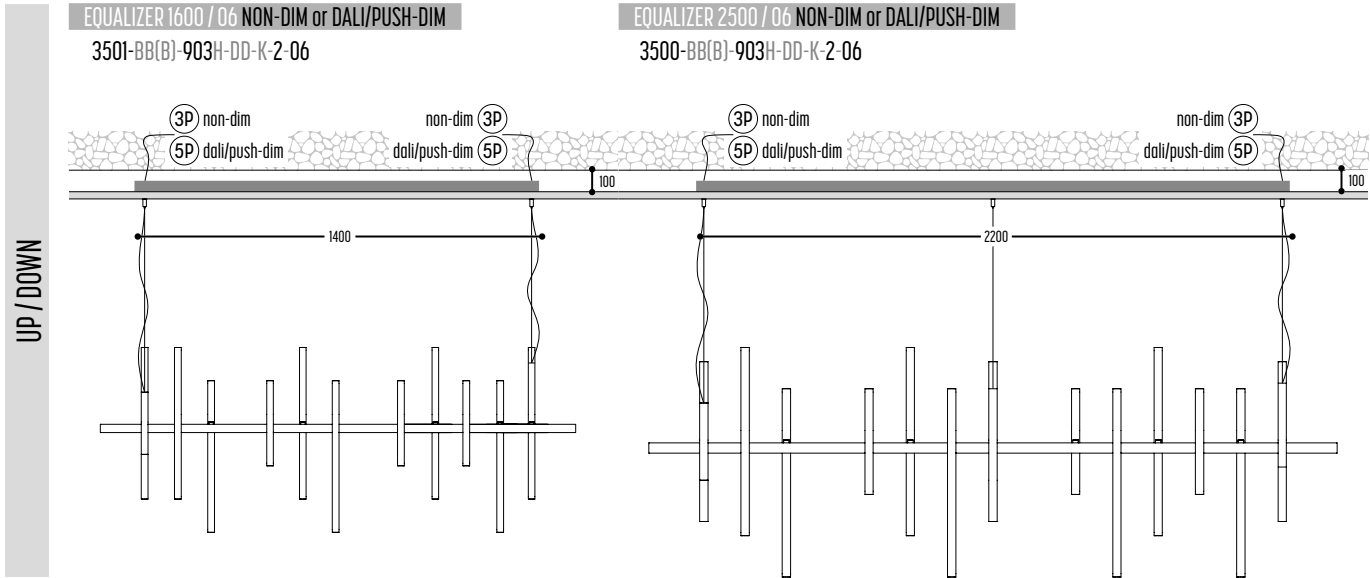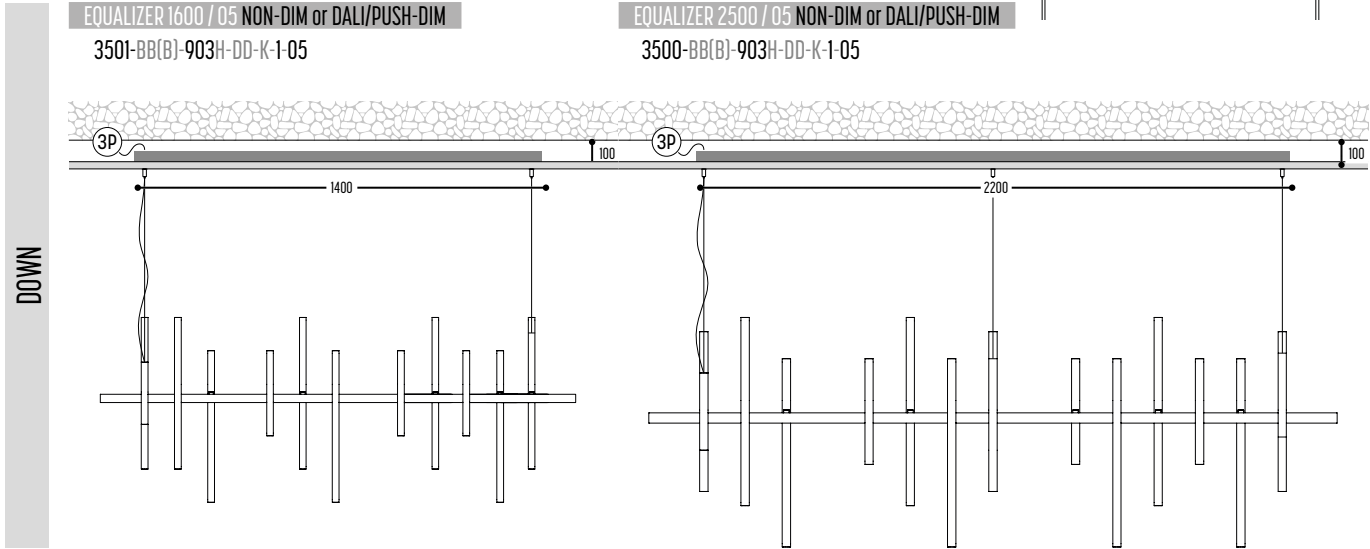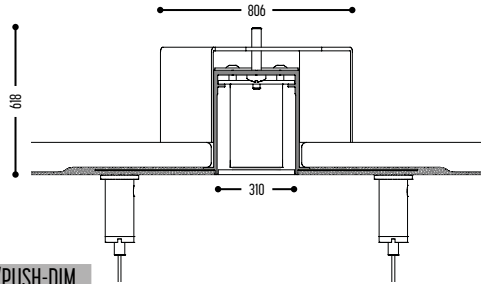

PLASTERBOARD – BA13
DRIVER REMOTE

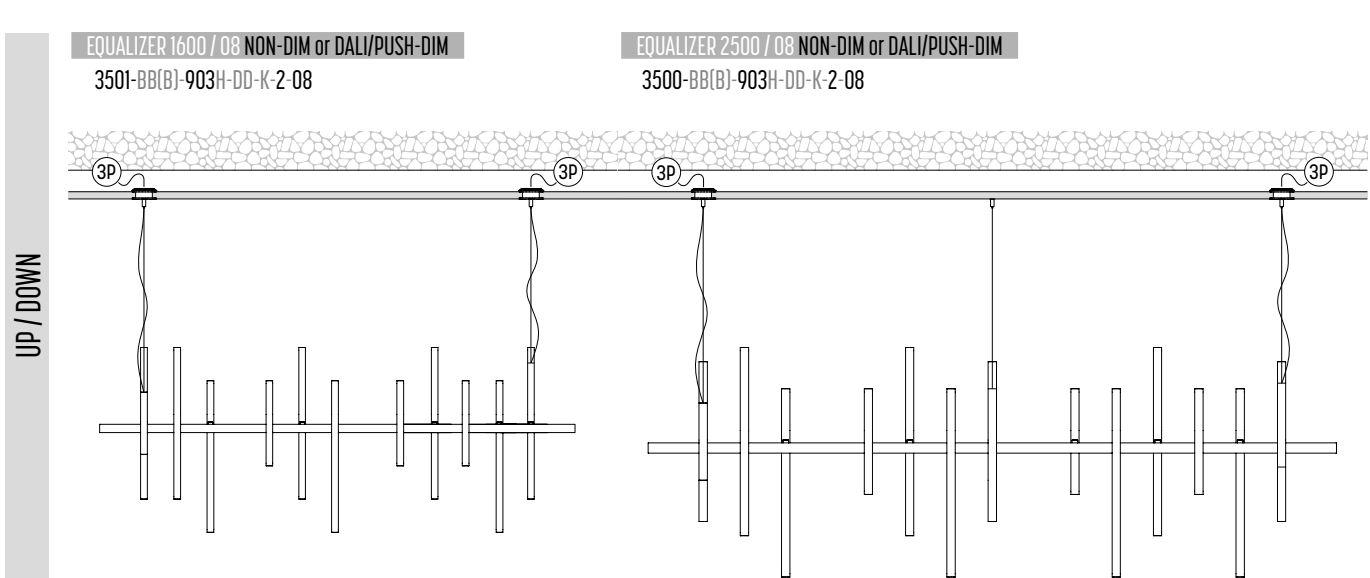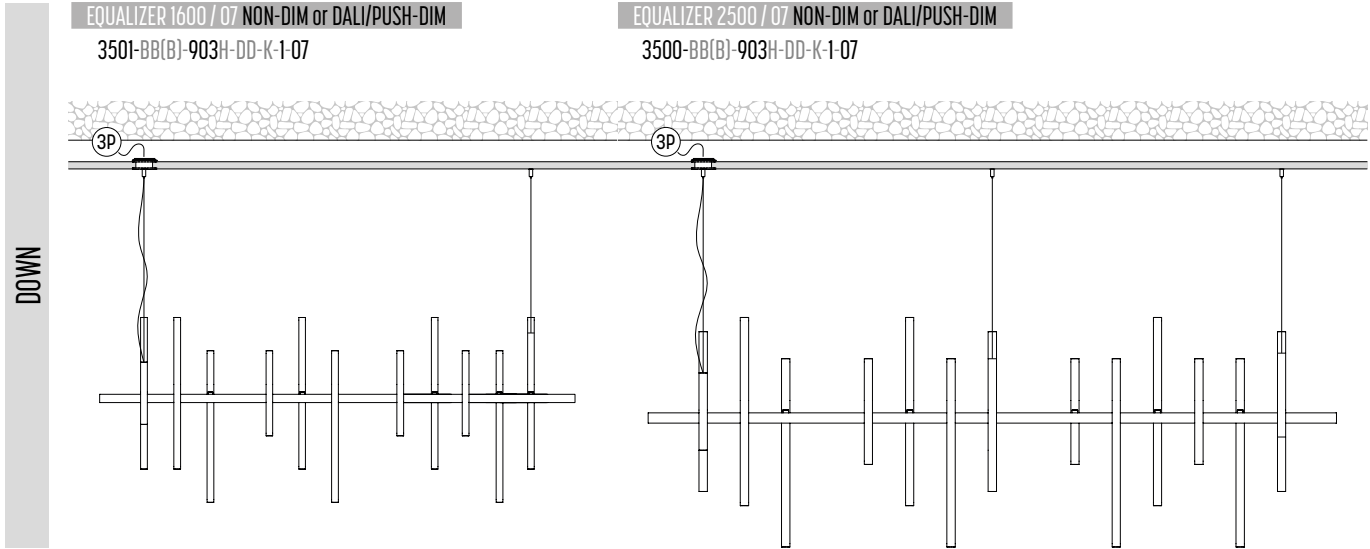



BB(B)	COLORS	02	Black
		03	White
		10	Alu
		150	Bronze Light
		151	Bronze Dark
EFF	CRI • LUMENOUTPUT	903	>90 CRI • 350 Lm / 350 mA / 3,5 W
H	COLOR TEMP.	2	2700K
		3	3000K
K	DRIVER	0	Non dimmable (extern)
		3	Dali (extern)
		4	Phase cut (extern)

Metal-Alu

CE

CC LED

850°

IP20

