

Zero Round

24V DC 24V  
M15301.050.0510

white




Data sheet

CODE	M15301.050.0510
SYSTEM POWER CONSUMPTION	25W
EFFICACY	81.56lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	2396lm
LUMEN OUTPUT	2039lm
EFFICIENCY	85.1%
WEIGHT	0,83 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	134,0 x 134,0 x 61,0 cm




Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.  
Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Suspension kit with griplocks and 5m (196,9") long steel cables.  
5m (196,9") long power cable in transparent PVC.  
Provided without power canopy.

Technical drawing

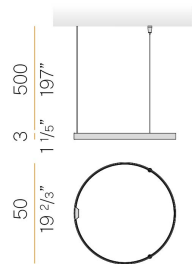

Polar diagram

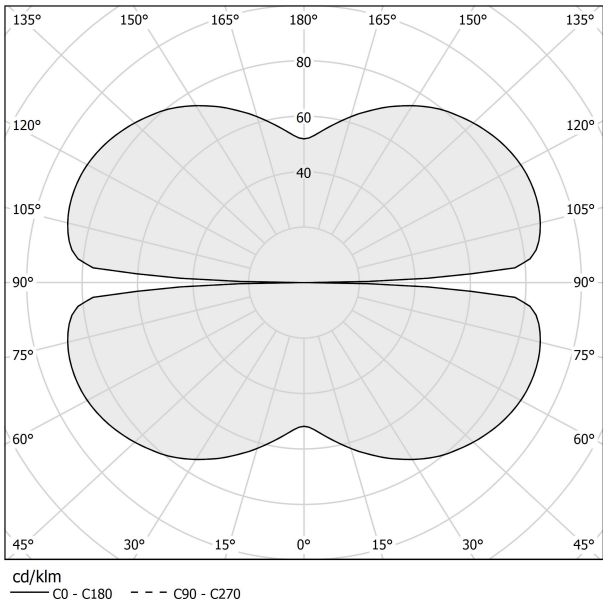

Zero Round

24V DC 24V  
M15301.075.0510

white




Data sheet

CODE	M15301.075.0510
SYSTEM POWER CONSUMPTION	36W
EFFICACY	84.97lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	3594lm
LUMEN OUTPUT	3059lm
EFFICIENCY	85.1%
WEIGHT	1,12 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	144,0 x 144,0 x 71,0 cm




Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.  
Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Suspension kit with griplocks and 5m (196,9") long steel cables.  
5m (196,9") long power cable in transparent PVC.  
Provided without power canopy.

Technical drawing

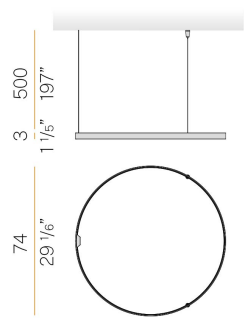

Polar diagram

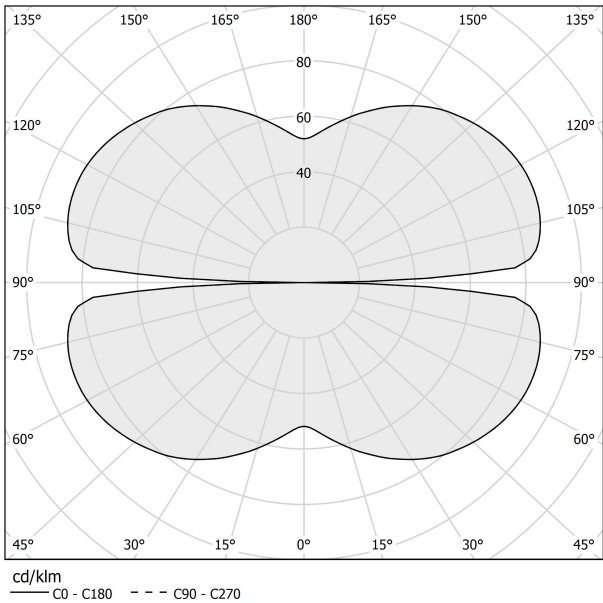

Zero Round

24V DC 24V  
M15301.100.0510

white




Data sheet

CODE	M15301.100.0510
SYSTEM POWER CONSUMPTION	47W
EFFICACY	86.79lm/W
LIGHT SOURCE	LED
LIGHT SOURCE LIFETIME	L70 (B50) 60.000h
COLOUR TEMPERATURE	2700K Ra>90
LIGHT DISTRIBUTION	diffused
POWER SUPPLY	24V DC
ELECTRICAL CONFIGURATION	24V
DRIVER	remote not included
NOMINAL LUMINOUS FLUX	4792lm
LUMEN OUTPUT	4079lm
EFFICIENCY	85.1%
WEIGHT	1,43 Kg
PROTECTION DEGREE	IP20
COLOUR TOLLERANCES	SDCM 3
PACKING DIMENSIONS	124,0 x 124,0 x 51,0 cm



Single or multiple suspension lighting fixture for interiors, with direct and indirect light emission.  
Bended extruded aluminium structure in white, black, bronze, mat brass or titanium polyacrylic paint.  
Extruded polycarbonate diffuser with opaline finish.  
Suspension kit with griplocks and 5m (196,9") long steel cables.  
5m (196,9") long power cable in transparent PVC.  
Provided without power canopy.

Technical drawing

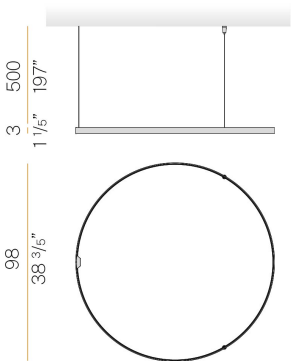

Polar diagram

