
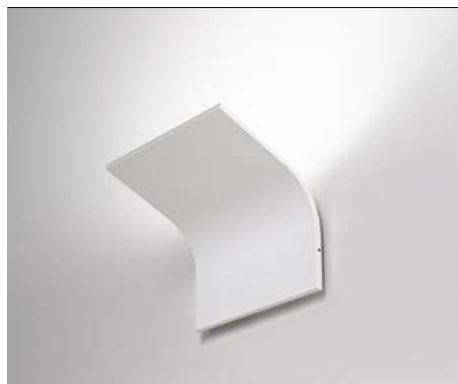






Lampada da parete in profilato di alluminio estruso. Sorgente luminosa composta da 1 modulo LED o 2 moduli LED a tensione di rete (220V). Modulo LED equipaggiato con speciale protezione da sovratensioni e coperchio di protezione trasparente. Dimmerazione possibile attraverso apposito variatore di luce (non incluso). Finitura con vernice poliacrilica bianca, ottone satinato o spazzolato e verniciato color titanio. Fissaggio con grani laterali a scomparsa. Ideale per corridoi o uso residenziale.

Wall lamp in extruded aluminium. Lighting source made of 1 LED module or 2 LED modules to mains voltage (220V). LED module equipped with special protection from power surges and transparent cover. Possible dimming with specific dimmer (not included) – available as accessory. White or mat brass polyacrylic paint or brushed and painted in titanium colour. Fixing with hidden lateral grub screw. Ideal for corridors or residential use.

	CODICE CODE	FONTI LUMINOSE LIGHT SOURCES	kg
	 A09801.001.0406	Potenza assorbita apparecchio / Luminaire power consumption 18W	1,00
	A09819.001.0406	Flusso luminoso apparecchio / Luminaire luminous flux 1431lm	
	A09830.001.0406	3000K Ra>90 220-240V AC ON-OFF  IP20	
	 A09801.002.0406	Potenza assorbita apparecchio / Luminaire power consumption 36W	2,03
	A09819.002.0406	Flusso luminoso apparecchio / Luminaire luminous flux 2862lm	
	A09830.002.0406	3000K Ra>90 220-240V AC ON-OFF  IP20	
	XM14/230	Dispositivo dimmerabile per moduli LED a 230V, 5÷100W. Dimmable device for 230V LED modules, 5÷100W.	

Fotometrie disponibili www.panzeri.it / Photometric data available at www.panzeri.it

CODICI COLORI DISPONIBILI / COLOUR CODES AVAILABLE

Disponibili a richiesta LED 2700K / On request 2700K LED available

01 bianco
white

19 ottone satinato
mat brass

30 titanio
titanium

