


EMANUELLE PURE

design gregoire maisonndieu






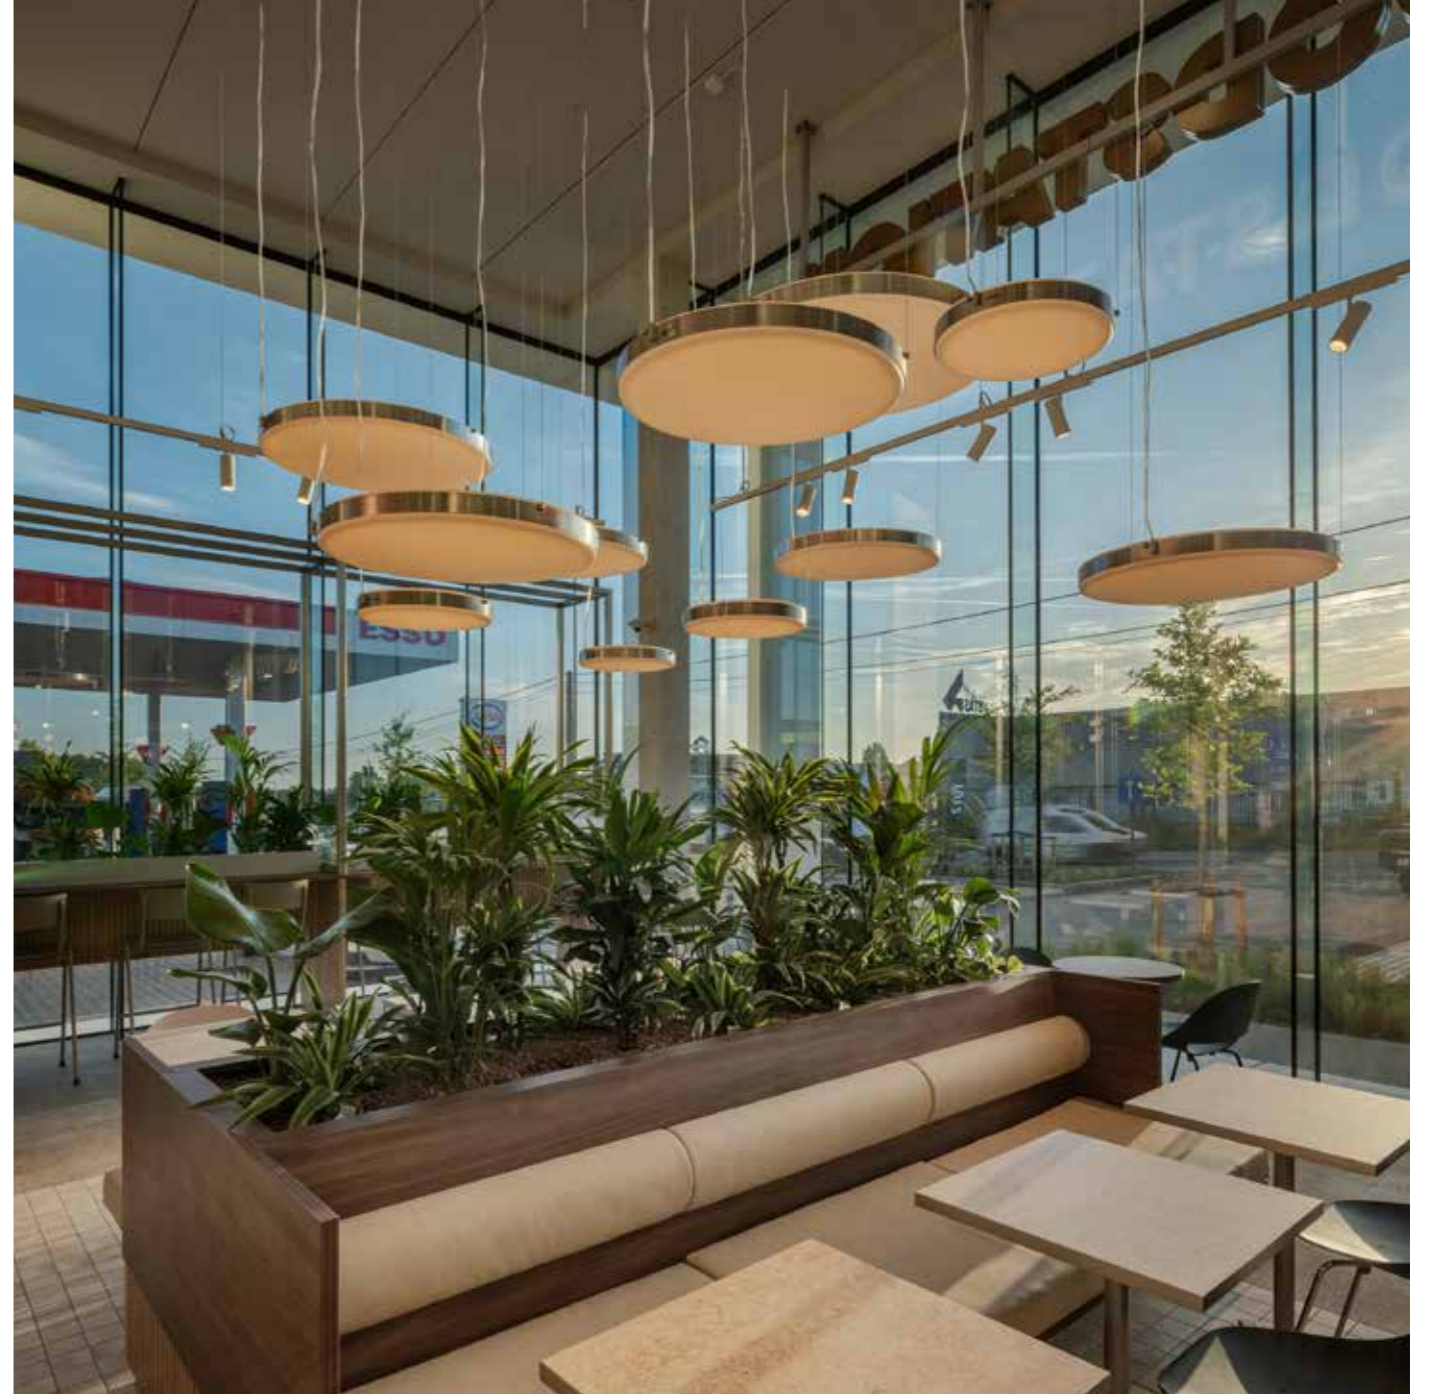


EMANUELLE PURE 400 H

3335-BB(B)-14-2-DD-K

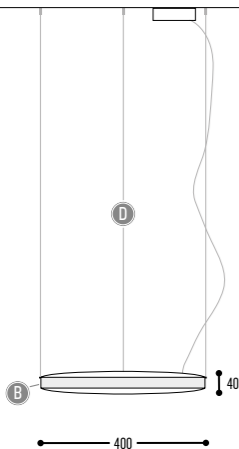


EMANUELLE PURE 600 H

3336-BB(B)-14-2-DD-K

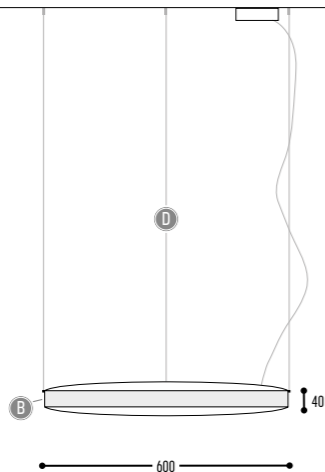

EMANUELLE PURE 800 H

3337-BB(B)-14-2-DD-K

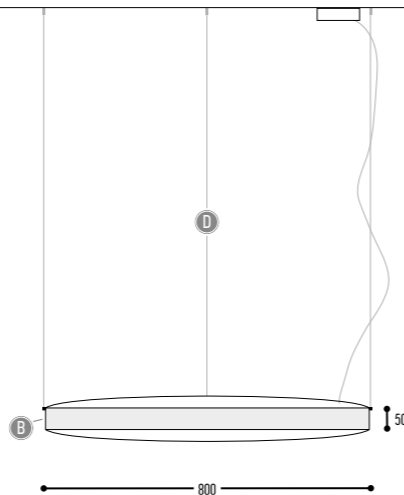

BB(B)	COLORS	10	Alu
		151	Bronze Dark
FF	LED	14	>90 CRI • 800 Lm / 14 W/m
			>90 CRI • 1200 Lm / 14 W/m
			>90 CRI • 1500 Lm / 14 W/m
H	COLOR TEMP.	2	2700K
DD	SUSP. CABLE.	01	1,5 m
		02	2,5 m
K	DRIVER	0	Non dimmable (intern)
		3	Dali (extern)
		4	Phase cut (intern)

Alu-PC

